

LOC I-DQG

111.7

APP CRS

003°

Rwy ldg

10000

TDZE

707

Apt Elev

748

ILS or LOC RWY 36C


CHARLOTTE/DOUGLAS INTL (CLT)

RADAR required for procedure entry. DME or RADAR required.

ALSIF-2

MISSED APPROACH: Climb to 3000 on CLT VOR/DME R-001 to TOMME/CLT 15.4 DME and hold.

D-ATIS	CHARLOTTE APP CON	CHARLOTTE TOWER	GND CON	CLNC DEL
ARR 121.15	(001°-119°) 128.32	(Rwys 18L-36R, 5-23) 118.1 257.8	121.8 348.6 (WEST)	127.15
DEP 132.1	(120°-295°) 120.05	(Rwy 18C-36C) 126.4 257.8	121.9 348.6 (EAST)	348.6
	(296°-360°) 134.75	(Rwy 18R-36L) 133.35 257.8		
	(180°-359°) 257.2			
	(360°-179°) 307.8			

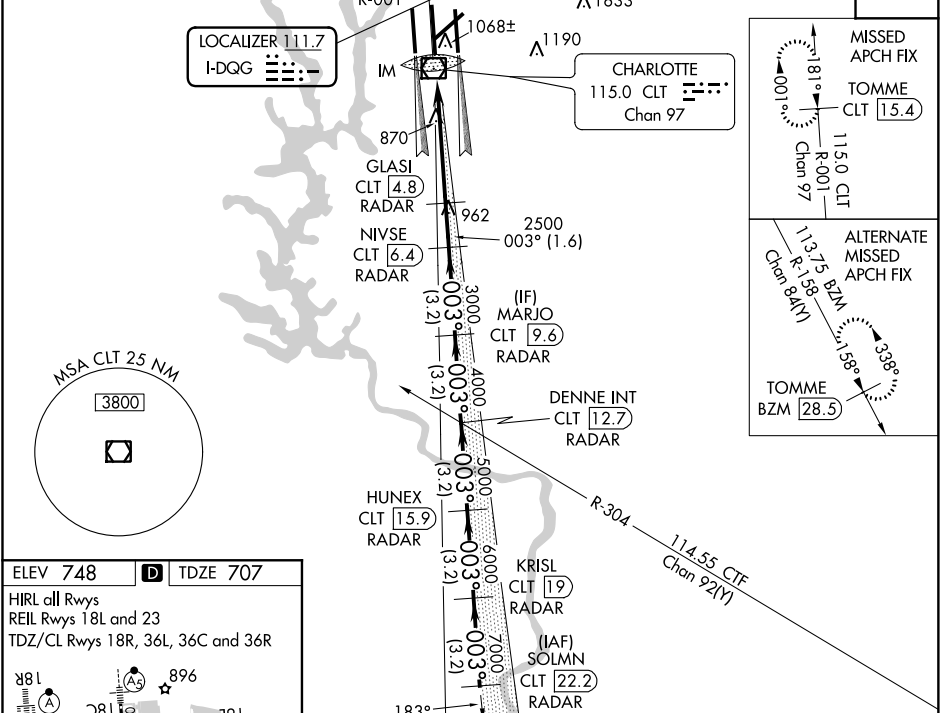

ELEV 748

D

TDZE 707

HIRL all Rwys

REIL Rwys 18L and 23

TDZ/CL Rwys 18R, 36L, 36C and 36R

FAF to MAP 5.4 NM

003° 5.4 NM from FAF

CLT 3000

CLT 2500

CLT 2000

CLT 1500

CLT 1000

CLT 500

CLT 0

0.2 5.2 NM

1.6 NM

3.2 NM

3.2 NM

3.2 NM

3.2 NM

3.2 NM

CATEGORY

A

B

C

D

S-ILS 36C

907/18

200 (200-1/2)

S-LOC 36C

1120/24

413 (400-1/2)

CIRCLING

1380-1

632 (700-1)

1500-2 1/4

752 (800-2 1/4)

1500-2 1/2

752 (800-2 1/2)