

WAAS CH 70602 W03A	APP CRS 032°	Rwy Idg 10502 TDZE 3680 Apt Elev 3680
--	------------------------	--

RNAV (GPS) Y RWY 3

GREAT FALLS INTL (GTF)


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C (-13°F) or above 50°C (123°F). DME/DME RNP-0.3 NA. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500.

ALSF-2

MISSED APPROACH:

Climb to 6200 direct DEELM and on track 032° to PSHKN and hold.

ATIS 126.6 269.0	GREAT FALLS APP CON 128.6 379.175	GREAT FALLS TOWER 118.7 282.2	GND CON 121.7 348.6	CLNC DEL 121.7 348.6
----------------------------	---	---	-------------------------------	--------------------------------

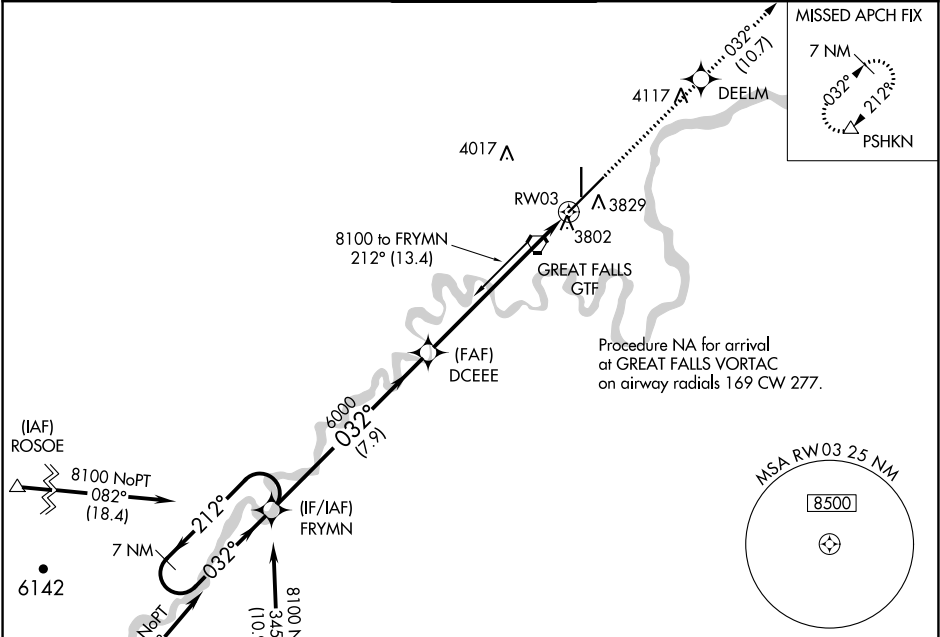

ELEV 3680	TDZE 3680
-----------	-----------

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 70).

7 NM Holding Pattern

8100

GP 3.00° TCH 54

FRYMN

DCEEE

RW03

PSHKN

7.9 NM

5.9 NM

1.2 NM

3880/18

200 (200-½)

3963/24

283 (300-½)

4140/24

460 (500-½)

4140/45

460 (500-¾)

4320-1¾

640 (700-1¾)

4420-2¼

740 (800-2¼)

CIRCLING

4140-1

460 (500-1)

4320-1¾

640 (700-1¾)

4420-2¼

740 (800-2¼)

ELEV 3680

TDZE 3680

6200

DEELM

tr 032°

PSHKN

*LNAV only

*1.2 NM to RW03

RW03

3735

3798

TWR 3818

032° to RW03