

ALTNN ONE DEPARTURE (RNAV)

D-ATIS
133.675
CLNC DEL
135.35
CPDLC

GND CON
(Rwys 8L/R, 12, 26L/R)
121.8 348.6
(Rwys 9, 27, 30)
127.5 348.6
MIAMI TOWER
118.3 256.9
MIAMI DEP CON
119.45 290.325

RNAV 1 - DME/DME/IRU or GPS.

RADAR required.

TOP ALTITUDE:
5000

TAKEOFF MINIMUMS

Rwy 8L: Standard with minimum climb of 500' per NM to 520, then minimum climb of 215 to 1400.

Rwy 8R: Standard with minimum climb of 500' per NM to 520, then minimum climb of 235 to 1400.


Rwy 9: Standard with minimum climb of 500' per NM to 520, then minimum climb of 240 to 1400.

Rwy 12: Standard with minimum climb of 500' per NM to 520, then minimum climb of 230 to 1400.

Rwys 26L/R, 27, 30: Standard with minimum climb of 500' per NM to 520.

NOTE: Jet aircraft only.

NOTE: Accelerate to 250K, if unable, advise ATC.

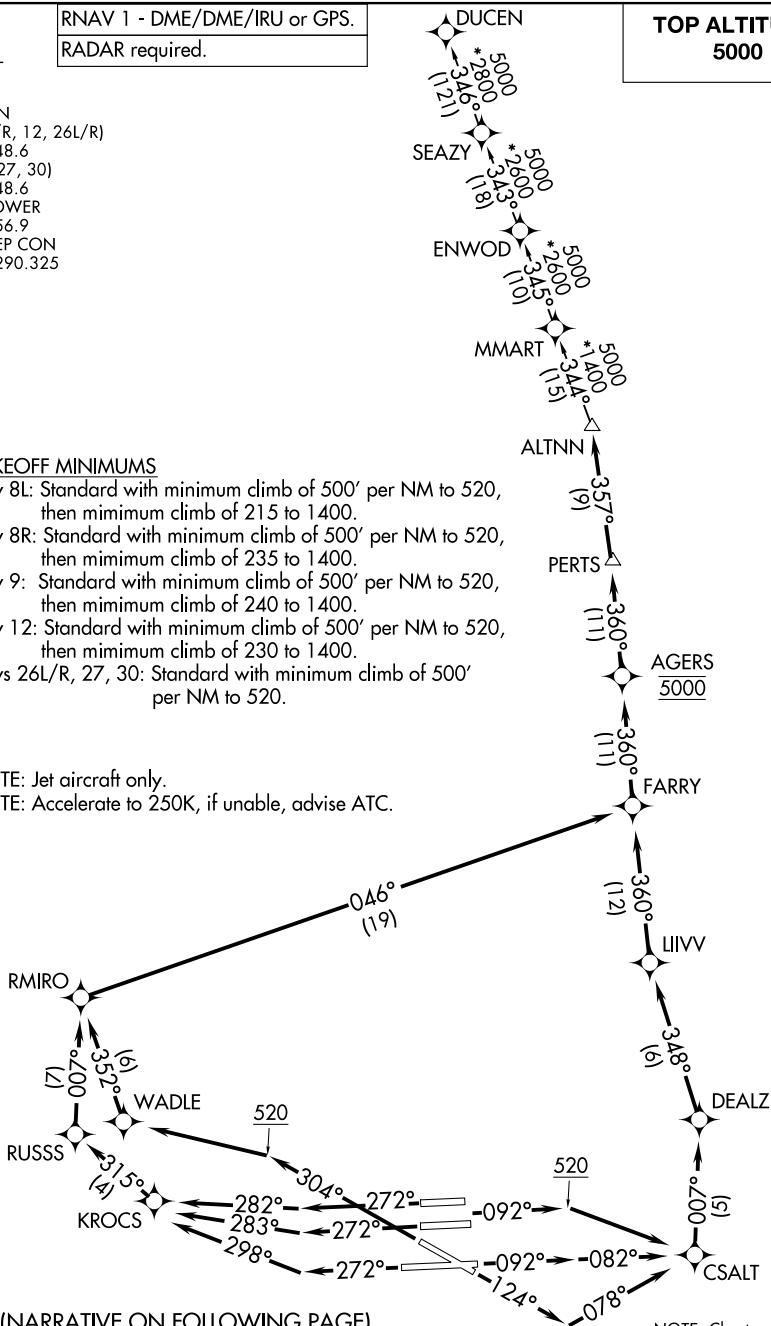

NOTE: Chart not to scale.

ALTNN ONE DEPARTURE (RNAV)

(ALTNN1.ALTNN) 19MAY22

MIAMI, FLORIDA
MIAMI INTL (MIA)

SE-3, 19 MAY 2022 to 16 JUN 2022