


D-ATIS
135.8 363.0
CLNC DEL
124.9 370.85
CPDLC
GND CON
121.9 348.6
RENO TOWER
118.7 257.8
NORCAL DEP CON
126.3 353.9

TOP ALTITUDE:
10000

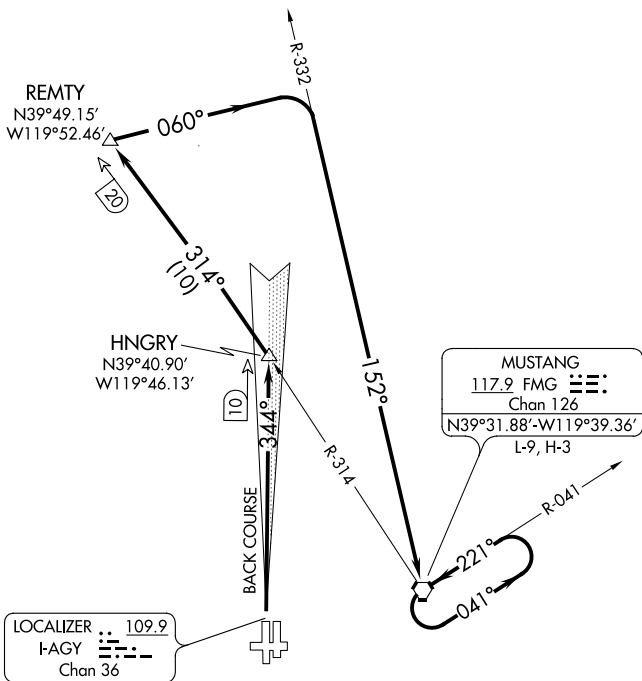

TAKEOFF MINIMUMS

Rwy 7: NA- obstacles

Rwys 16L, 16R, 25: NA-ATC.

Rwy 34L: Standard with minimum climb of 315' per NM to 8400.

Rwy 34R: Standard with minimum climb of 480' per NM to 8400,
or 500-1½ with minimum climb of 315' per NM to 8400.

NOTE: DME required.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 34L/R: Climb to 10000 or assigned altitude via I-AGY localizer north course to HNGRY INT/I-AGY 10 DME, and intercept FMG R-314 to REMTY/FMG 20 DME, and right turn heading 060° to intercept FMG R-332 to FMG VORTAC. Climb in FMG holding pattern to depart FMG VORTAC at or above MEA/MCA for route of flight. Expect clearance to requested altitude five minutes after departure.