

WAAS
CH **45518**
W28A

APP CRS
279°

Rwy Idg
TDZE
Apt Elev

9189
18
20

RNAV (GPS) Y RWY 28R

PALM BEACH INTL (PBI)


RNP APCH - GPS.

▼


For uncompensated Baro-VNAV systems, procedure NA below 6°C or above 54°C.

MISSED APPROACH: Climb to 500 then climbing right turn to 3000 direct MORGA and hold.

D-ATIS 123.75	PALM BEACH APP CON 128.3 317.4	PALM BEACH TOWER 119.1 257.8	GND CON 121.9 284.6	CLNC DEL 121.6 284.6
-------------------------	--	--	-------------------------------	--------------------------------

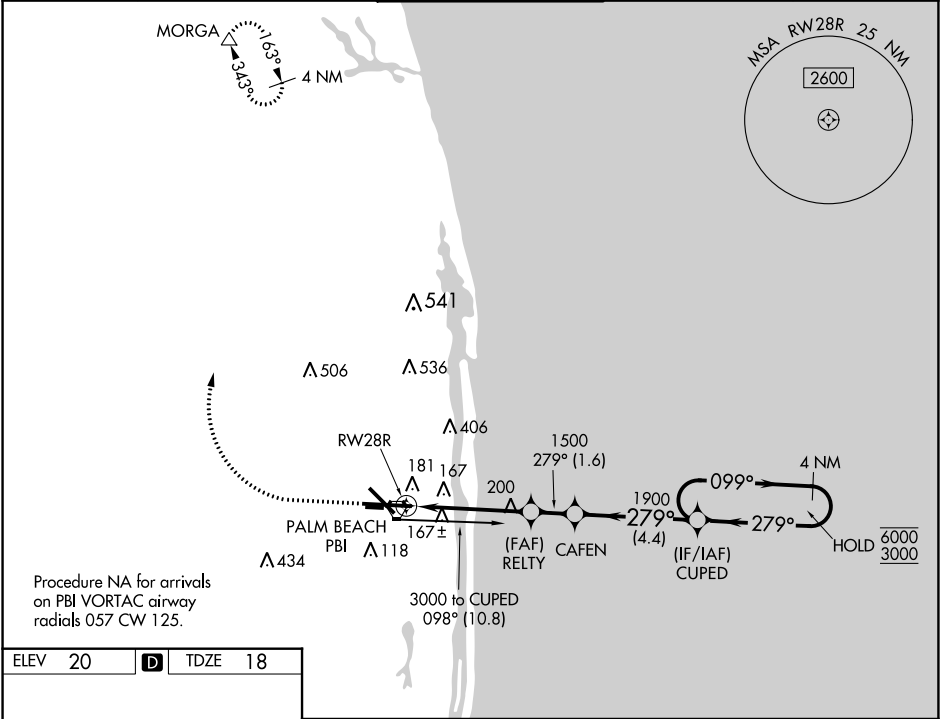

ELEV 20	D	TDZE 18
---------	----------	---------

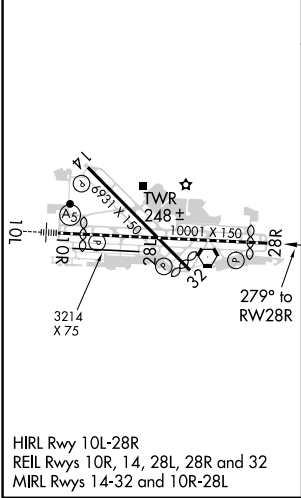

500	3000	MORGA	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 70).	4 NM Holding Pattern
↑	↘	△		
RELTY	CAFEN	CUPED	1.2 NM to RWY 28R	1500
1500	1900	279°	099°	6000
1.2	3.3	1.6	4.4	GP 3.00° TCH 58
CATEGORY	A	B	C	D
LPV DA	218/40	200 (200-¾)		
LNAV/VNAV DA	342/50	324 (400-1)		
LNAV MDA	460/55	442 (500-1)	460-1⅓	442 (500-1⅓)
C CIRCLING	560-1	540 (600-1)	740-2 720 (800-2)	780-2½ 760 (800-2½)