

APP CRS
221°

Rwy Idg
TDZE
Apt Elev

8004
661
661

RNAV (GPS) RWY 22

GENERAL DOWNING-PEORIA INTL (PIA)

RNP APCH

▼


▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. When local altimeter setting not received, use Logan County altimeter setting and increase all DA 89 feet and all MDA 100 feet, increase LNAV/VNAV DA all Cats visibility to 1½ mile, LNAV MDA Cat C and D visibility to 1¾ mile, and Circling Cat C ¾ mile and Cat D ½ mile. Baro-VNAV and VDP NA when using Logan County altimeter setting. Rwy 22 helicopter visibility reduction below ¾ SM NA. Circling Rwy 13, 31 NA at night.

MISSED APPROACH:

Climb to 2700 direct SADEE and hold.

ATIS	PEORIA APP CON	PEORIA TOWER	GND CON
126.1 282.2	125.8 269.2	124.0 353.85	121.85 348.6

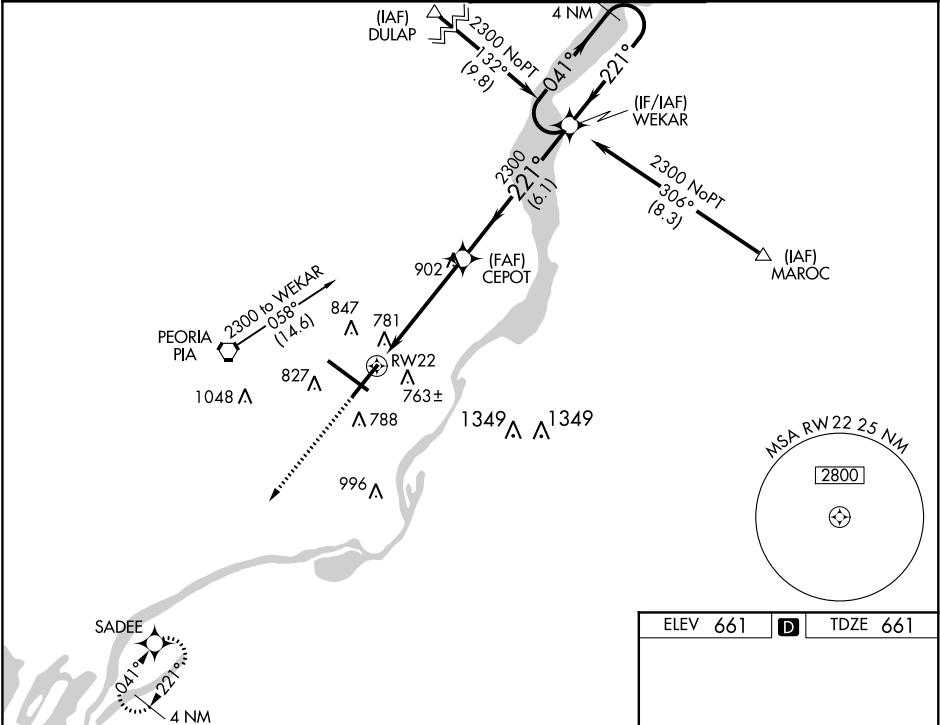

2700

SADEE

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 45).

*LNAV only

1.4

3.5 NM

6.1 NM

2300

221°

041°

2300

GP 3.00°

TCH 55

CATEGORY	A	B	C	D
LNAV/VNAV DA	1093-13 ⁵ / ₈ 432 (500-1 ³ / ₈)			
LNAV MDA	1160-1 499 (500-1)		1160-1 ³ / ₈ 499 (500-1 ³ / ₈)	
CIRCLING	1160-1 499 (500-1)		1180-1 ¹ / ₂ 519 (600-1 ¹ / ₂) 1400-2 ¹ / ₄ 739 (800-2 ¹ / ₄)	

ELEV 661

D

TDZE 661

221° to RW22

TWR 755

10104 X 150

800 X 150

692±

HIRL Rwy 4-22 and 13-31