

WAAS CH 50408 W17A	APP CRS 175°	Rwy Idg TDZE Apt Elev	7201 1004 1009
--	------------------------	-----------------------------	---



RNAV (GPS) RWY 17
PONCA CITY RGNL (PNC)

⚠ For inop MALS, increase LPV visibility to 1 mile. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. When local altimeter setting not received use Winfield-Arkansas City altimeter setting and increase all LPV DA to 1361 feet, LNAV/VNAV DA to 1412 feet and all MDA 100 feet; increase LPV all Cats, LNAV/VNAV all Cats, LNAV Cats C and D and Circling Cat C and D visibility ¼ SM. VDP NA when using Winfield-Arkansas City altimeter setting. For inop MALS when using Winfield-Arkansas City altimeter setting, increase LPV and LNAV/VNAV visibility ¼ mile all Cats, increase LNAV Cats C and D visibility ¼ mile. Baro-VNAV NA when using Winfield-Arkansas City altimeter setting.


MALS

MISSED APPROACH:
Climb to 2700 direct
ZULOT and hold.

ASOS 134.075	KANSAS CITY CENTER 127.8 319.1	UNICOM 123.0 (CTAF) 0
------------------------	--	---------------------------------

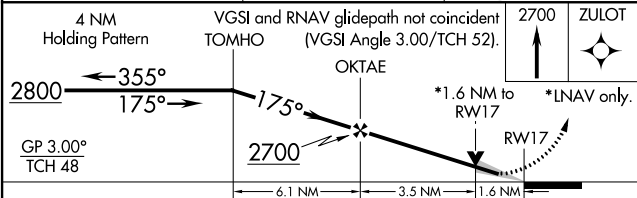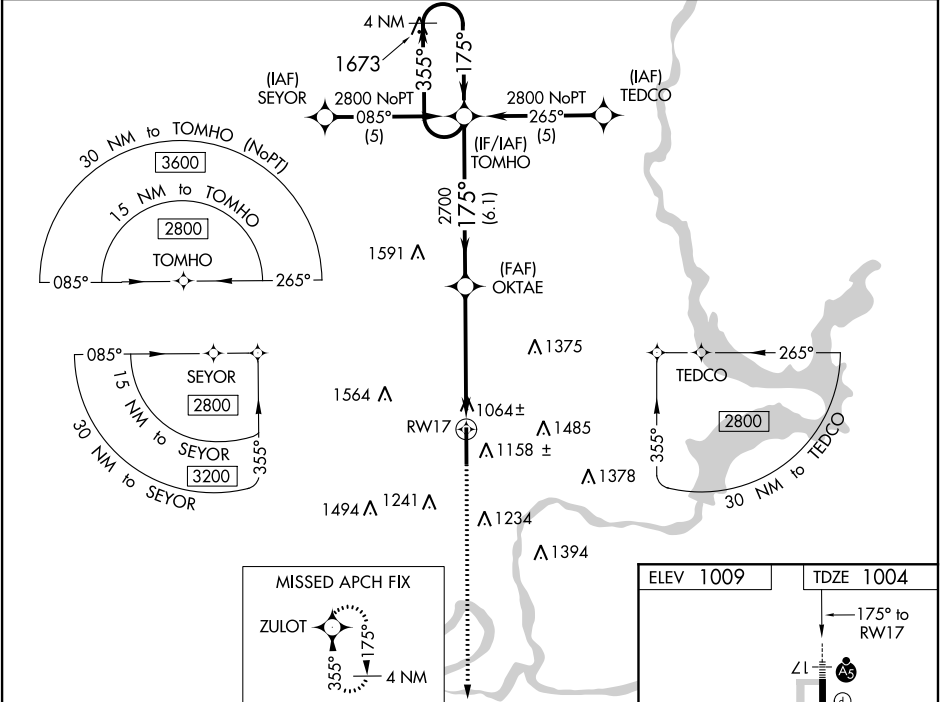

CATEGORY	A	B	C	D
LPV DA	1279-1/2		275 (300-1/2)	
LNAV/VNAV DA	1330-3/4		326 (400-3/4)	
LNAV MDA	1540-1/2	536 (600-1/2)	1540-1 536 (600-1)	1540-1 1/4 536 (600-1 1/4)
CIRCLING	1540-1 531 (600-1)	1580-1 571 (600-1)	1800-2 1/4 791 (800-2 1/4)	1880-2 3/4 871 (900-2 3/4)

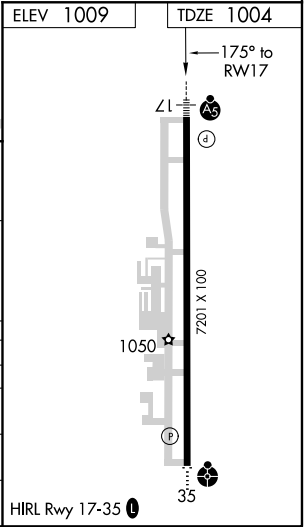

SC-1, 19 MAY 2022 to 16 JUN 2022

SC-1, 19 MAY 2022 to 16 JUN 2022