
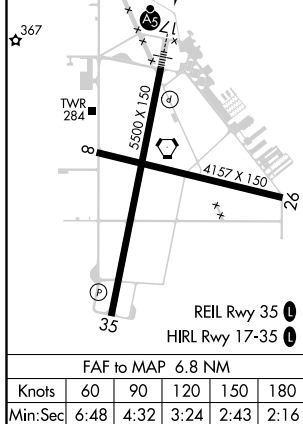


LOC I-OLM <u>111.9</u>	APP CRS 176°	Rwy Idg 5500 TDZE 207 Apt Elev 208
----------------------------------	------------------------	---

ILS or LOC RWY 17
OLYMPIA RGNL (OLM)

 DME or RADAR required. For inop ALS, increase S-LOC 17 Cat C/D visibility to 1½ SM.	MALS R 	MISSED APPROACH: Climb to 1400 then climb to 5500 on OLM VORTAC R-176 to CETRA INT/OLM 15 DME and hold, continue climb-in-hold to 5500.
--	---	--

ATIS★ 135.725	SEATTLE APP CON 121.1 290.9	OLYMPIA TOWER★ 124.4 (CTAF) 254.25	GND CON 121.6	UNICOM 122.95
------------------	--------------------------------	---------------------------------------	------------------	------------------

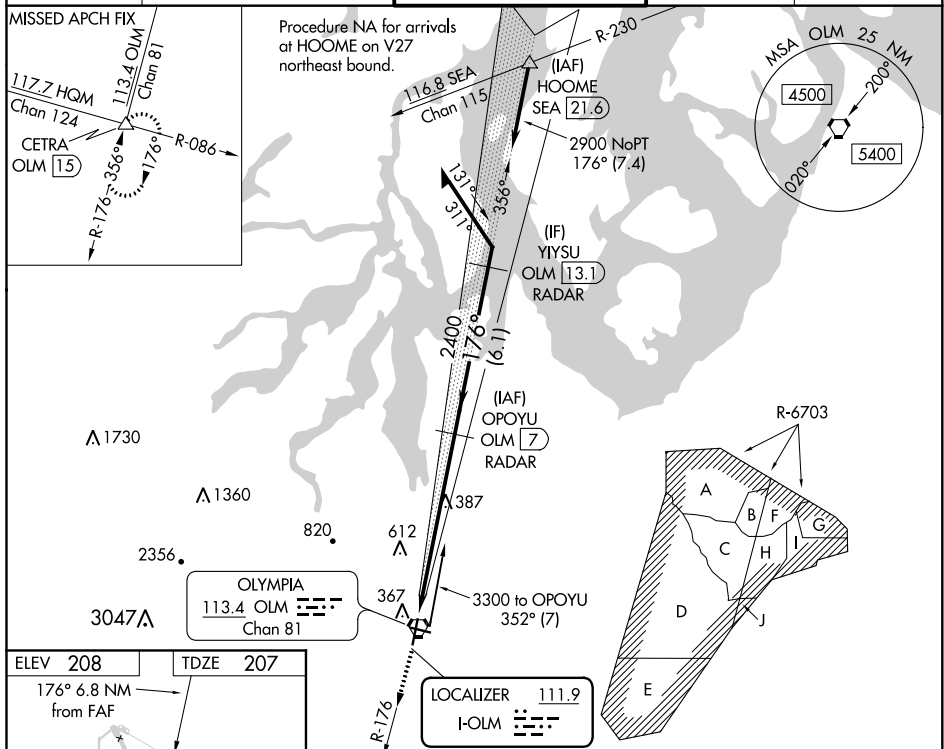

1400 ↑	5500 ↑ OLM R-176	CETRA △	OPOYU OLM (7) RADAR	3300	2400	2900	GS 3.00° TCH 53
OLM 0.3		6.8 NM		356°		176°	
Remain within 10 NM							
CATEGORY	A	B	C	D			
S-ILS 17	407-½ 200 (200-½)						
S-LOC 17	680-½ 473 (500-½)		680-1 473 (500-1)				
CIRCLING	720-1 512 (600-1)	860-1 652 (700-1)	1020-2½ 812 (900-2½)	1020-2¾ 812 (900-2¾)			