


WAAS CH 97431 W01A	APP CRS 013°	Rwy Idg TDZE Apt Elev	9072 1180 1204
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 1


SAWYER INTL (SAW)





RNP APCH.

▼ For inop ALS, increase LNAV Cat C/D visibility to 1½ SM.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.


MALSR 


MISSED APPROACH:
Climb to 3500 direct ZUCTI and hold.

AWOS-3 118.375	MINNEAPOLIS CENTER 119.1 290.2	SAWYER TOWER ★ 119.975 (CTAF) 	GND CON 121.65	UNICOM 122.7
--------------------------	--	---	--------------------------	------------------------

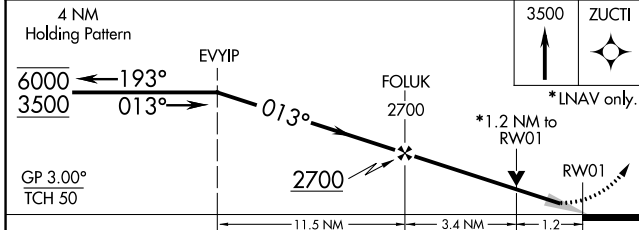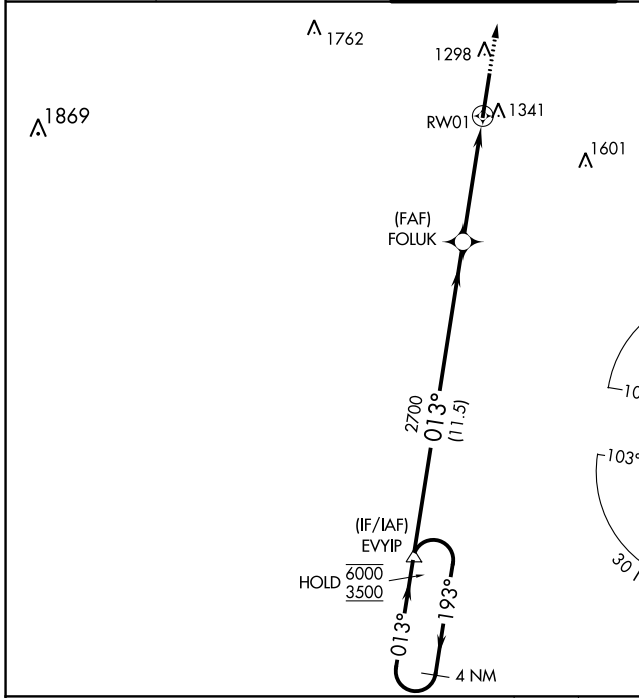

ELEV 1204  TDZE 1180

CATEGORY	A	B	C	D
LPV DA		1380-½	200 (200-½)	
LNAV/VNAV DA		1503-½	323 (300-½)	
LNAV MDA	1600-½	420 (400-½)	1600-¾	420 (400-¾)
 CIRCLING	1680-1	476 (500-1)	1820-1¾ 616 (700-1¾)	1820-2 616 (700-2)

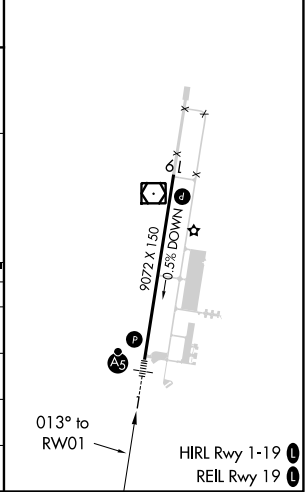

EC-1, 19 MAY 2022 to 16 JUN 2022

EC-1, 19 MAY 2022 to 16 JUN 2022