ILS or LOC/DME RWY 32

SMYRNA (MQY)

LOC I-MQY	APP CRS	Rwy Idg	8038
111.1	321°	TDZE	518
		Apt Elev	543

T A DME from BNA VORTAC, simultaneous reception of I-MQY and BNA DME required. For inop MALSR, increase S-LOC 32 Cats C/D visibility to 1 mile. For inop MALSR when using Nashville Intl altimeter setting, increase S-LOC 32 Cats C/D visibility ⅜ mile. When local altimeter setting not received, use Nashville Intl altimeter setting and increase all DA to 749 feet and all MDA 40 feet; increase S-LOC 32 Cats C/D visibility ⅛ mile and increase Circling Cats C/D visibility ¼ mile. VDP NA when using Nashville Intl altimeter setting.

MALSR

MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 on heading 090° and BNA VORTAC R-127 to CUYAG INT/ BNA VORTAC 18.6 DME and hold.

AWOS-3PT	NASHVILLE APP CON	SMYRNA TOWER ★	GND CON	CLNC DEL	CLNC DEL (When twr closed)	UNICOM
119.125	118.4 360.7	118.5 (CTAF) L 233.1	121.4	121.4	121.7	122.95

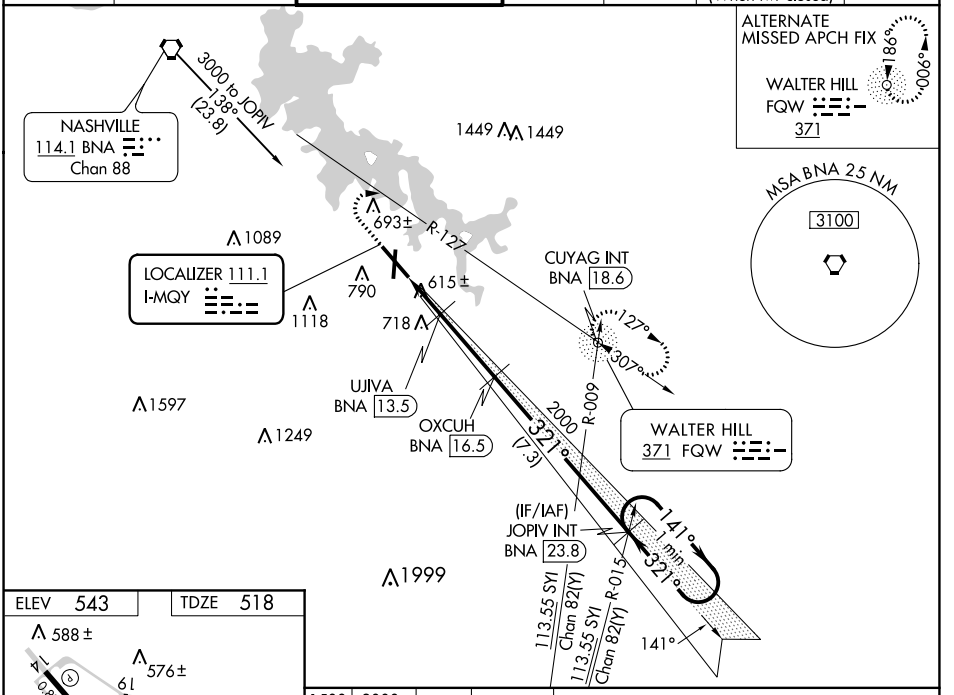

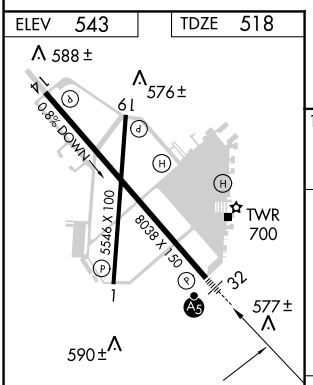

REIL Rwy 14 L
HIRL Rwy 14-32 L
MIRL Rwy 1-19 L
REIL Rwys 1, 19, and 32

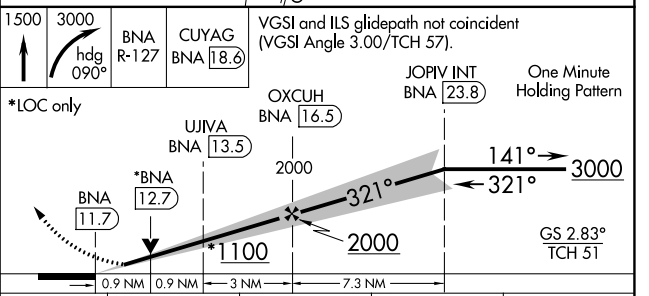

CATEGORY	A	B	C	D
S-ILS 32	718-½ 200 (200-½)			
S-LOC 32	880-½ 362 (400-½)		880-⅝ 362 (400-⅝)	
C CIRCLING	1100-1 557 (600-1)	1200-1 657 (700-1)	1260-2 717 (800-2)	1480-2¾ 937 (1000-2¾)

SE-1, 19 MAY 2022 to 16 JUN 2022
SE-1, 19 MAY 2022 to 16 JUN 2022