

WAAS CH 65621 W04A	APP CRS 045°	Rwy Idg 5130 TDZE 51 Apt Elev 53
--	------------------------	---

RNAV (GPS) RWY 4


DELAWARE COASTAL (GED)

⚠ DME/DME RNP-0.3 NA. When local altimeter setting not received, use Salisbury altimeter setting and increase LPV DA to 353 feet, LNAV/VNAV DA to 555 feet, increase all MDA 60 feet.
⚠ Increase LNAV/VNAV all Cats visibility to 1 ½ mile, LNAV Cats C/D visibility to 1 ¼ mile and increase Circling Cat C visibility to 2 miles and Cat D visibility to 2 ¼ miles. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C (9°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Salisbury altimeter setting. For inoperative MALSS increase LNAV/VNAV all Cats and LNAV Cats C/D visibility ¼ mile. For inoperative MALSS increase LNAV/VNAV all Cats and LNAV Cats C/D visibility ¼ mile. For inoperative MALSS increase LNAV/VNAV all Cats and LNAV Cats C/D visibility ¼ mile. For inoperative MALSS increase LNAV/VNAV all Cats and LNAV Cats C/D visibility ¼ mile. Night Landing: Rwy 10, 28 NA.

MALS

MISSED APPROACH:
Climb to 2000 direct
HUVOX and hold.

ASOS 118.375	DOVER APP CON 132.425 257.875	UNICOM 123.0 (CTAF) 1
------------------------	---	---------------------------------

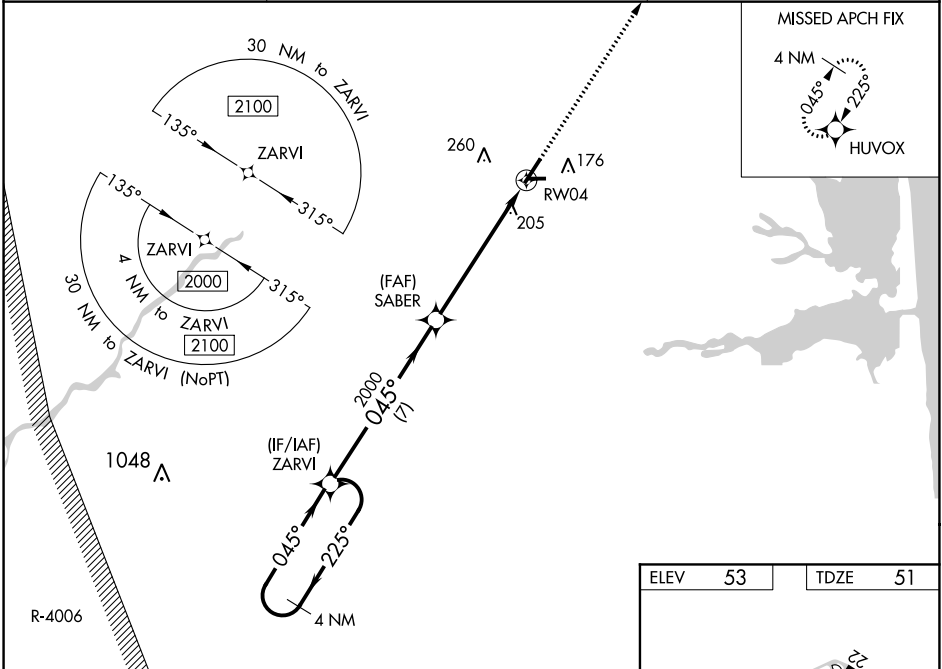

4 NM Holding Pattern		ZARVI	SABER	2000	HUVOX
2000		←225°	045°→	045°	
GP 3.00°		TCH 45			
		7 NM	4.7 NM	1.3 NM	
CATEGORY	A	B	C	D	
LPV DA	301-¾		250 (300-¾)		
LNAV/VNAV DA	503-1¼		452 (500-1¼)		
LNAV MDA	520-¾	469 (500-¾)	520-1⅛	469 (500-1⅛)	
CIRCLING	560-1 507 (600-1)	580-1 527 (600-1)	720-1¾ 667 (700-1¾)	720-2 667 (700-2)	

