

WAAS
CH **72941**
W15A

APP CRS
148°

Rwy Idg
TDZE **712**
Apt Elev **712**

RNP APCH.


▼

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C.
Rwy 15 helicopter visibility reduction below ¾ SM NA.

RNAV (GPS) RWY 15

AURORA MUNI (ARR)

ATIS 125.85	CHICAGO APP CON 133.5 349.0	AURORA TOWER★ 120.6 (CTAF) 0	GND CON 121.7	CLNC DEL 121.7 (When tower closed)	UNICOM 122.95 123.5
-----------------------	---------------------------------------	--	-------------------------	---	-------------------------------

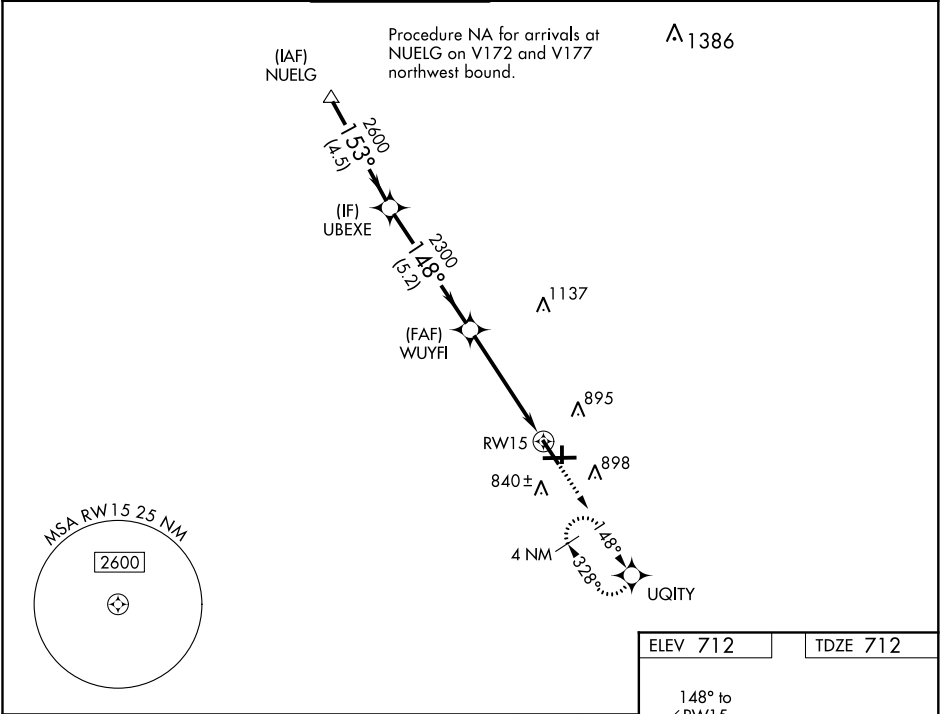

UBEXE

WUYFI

2600

2300

148°

GP 3.00°
TCH 45

5.2 NM

3.3 NM

1.6 NM

3000

UQITY

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 34).

*LNAV only.

*1.6 NM to RW15

CATEGORY	A	B	C	D
LPV DA		962-¾	250 (300-¾)	
LNAV/VNAV DA		962-¾	250 (300-¾)	
LNAV MDA	1260-1	548 (600-1)	1260-1½	548 (600-1½)
CIRCLING	1260-1	548 (600-1)	1260-1½ 548 (600-1½)	1320-2 608 (700-2)

ELEV 712

TDZE 712

148° to RW15

5502 x 100

81

3198 x 75

6501

33

36

775

784

839±