

WAAS CH 58314 W31A	APP CRS 311°	Rwy ldg TDZE Apt Elev	6401 1450 1470
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 31

DEVILS LAKE RGNL (DVL)



For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Cando altimeter setting. For inop MALSR, increase LNAV/VNAV all Cats visibility to ¾, LNAV Cats C and D visibility to 1 mile. When local altimeter setting not received, use Cando altimeter setting and increase all DA 63 feet, and all MDA 80 feet, increase LNAV/VNAV all Cats visibility ¼ mile, LNAV and Circling Cats C and D visibility ¼ mile. For inop MALSR when using Cando altimeter setting, increase LPV all Cats visibility to ¾ mile.

MALSR



MISSED APPROACH:
Climb to 3400 direct
KRAMR and hold.


AWOS-3PT 125.875	MINNEAPOLIS CENTER 124.2 270.3	UNICOM 122.8 (CTAF) 
----------------------------	--	---

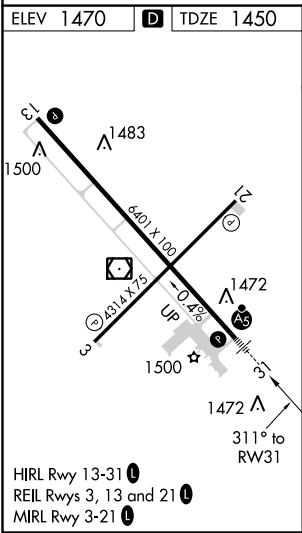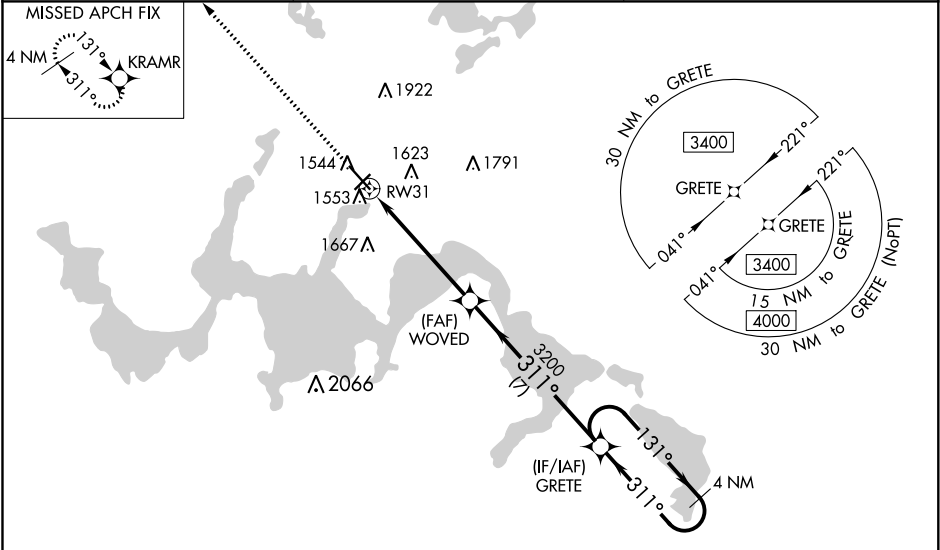

3400



*LNAV only.

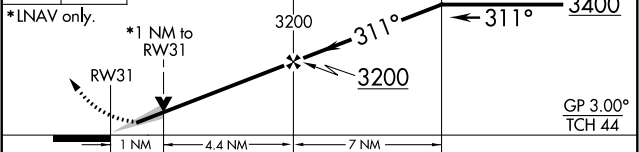

1 NM

4.4 NM

7 NM

CATEGORY	A	B	C	D
LPV DA	1650-½		200 (200-½)	
LNAV/VNAV DA	1721-½		271 (300-½)	
LNAV MDA	1820-½ 370 (400-½)		1820-⅝ 370 (400-⅝)	
 CIRCLING	2000-1 530 (600-1)		2240-2¼ 770 (800-2¼) 2240-2½ 770 (800-2½)	

GP 3.00°

TCH 44