


WAAS CH 49002 W17A	APP CRS 175°	Rwy Idg TDZE Apt Elev 4488 70 70
--	------------------------	--

RNAV (GPS) RWY 17

SUMMIT (EVY)

RNP APCH.	Procedure NA at night. Rwy 17 helicopter visibility reduction below 1 SM NA. Baro-VNAV NA when using Wilmington altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 47°C. When local altimeter setting not received, use Wilmington altimeter setting and increase all DA 27 feet, all MDA 40 feet and LNAV Cat C visibility 1/8 SM.	MISSED APPROACH: Climb to 2000 direct WENDS and hold.
-----------	--	---

AWOS-3 132.325	PHILADELPHIA APP CON 118.35 323.1	UNICOM 122.725 (CTAF)	123.5
--------------------------	---	---------------------------------	--------------

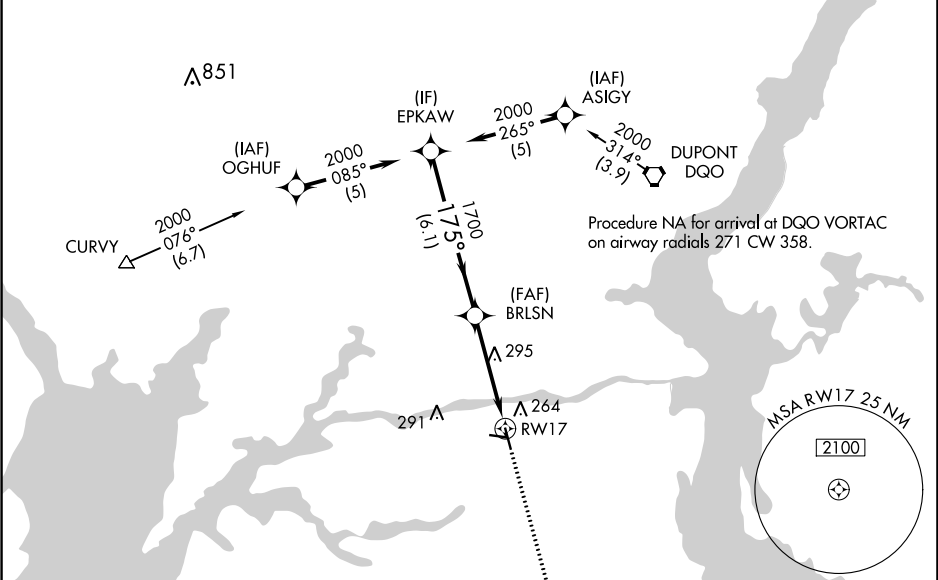

CATEGORY	A	B	C	D
LPV DA	541-1½	471 (500-1½)		NA
LNAV/VNAV DA	619-1¾	549 (600-1¾)		NA
LNAV MDA	560-1	490 (500-1)	560-1⅞ 490 (500-1⅞)	NA