

VORTAC FBC	APP CRS	Rwy Idg	4126
108.2	233°	TDZE	850
Chan 19		Apt Elev	851


VOR RWY 23
BLUFFTON (5G7)

▼ Use Findlay altimeter setting; when not received, use Lima altimeter setting and increase all MDA 20 feet, increase S-23 Cat C 1/8 SM and Circling Cat C/D visibility 1/4 SM.

⚠ NA

MISSED APPROACH: Climb to 2500 then right turn direct FBC VORTAC and hold.

FDY ASOS 132.85	TOLEDO APP CON 120.8 317.55	UNICOM 122.8 (CTAF) 0
--------------------	--------------------------------	---------------------------------

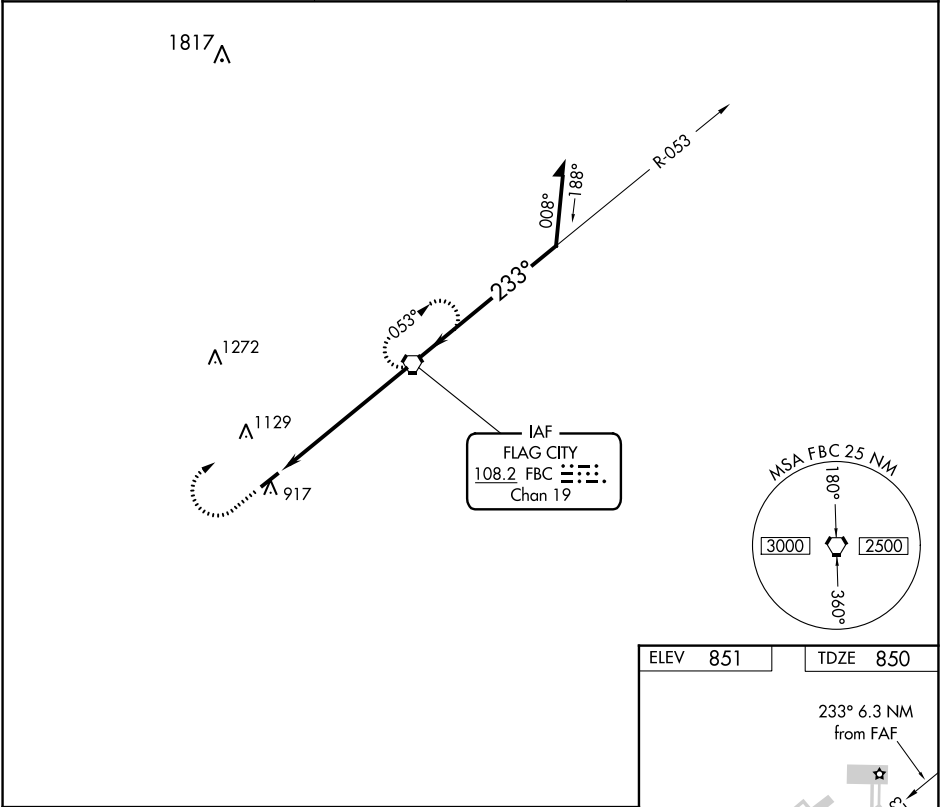

2500

FBC

FBC VORTAC

Remain within 10 NM

053°

233°

2500

2500

6.3 NM

CATEGORY	A	B	C	D
S-23	1360-1	510 (600-1)	1360-1 3/8 510 (600-1 3/8)	1360-1 1/2 510 (600-1 1/2)
C CIRCLING	1360-1 509 (600-1)	1520-1 669 (700-1)	1520-1 3/4 669 (700-1 3/4)	1520-2 669 (700-2)

ELEV 851	TDZE 850
----------	----------

233° 6.3 NM from FAF

▲ 1007

4126 x 75

REIL Rwy 5

REIL Rwy 23 **0**

MIRL Rwy 5-23 **0**

FAF to MAP 6.3 NM

Knots	60	90	120	150	180
Min:Sec	6:18	4:12	3:09	2:31	2:06