

LOC I-MKT 108.7	APP CRS 331°	Rwy Idg TDZE Apt Elev	6600 1021 1021
---------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 33
MANKATO RGNL (MKT)



NA

For inop MALSR when using Waseca altimeter setting, increase S-ILS 33 all Cats visibility to ¾ mile. When local altimeter setting not received, use Waseca altimeter setting: increase DA to 1278 feet; increase all MDA 60 feet and increase S-LOC 33 Cats C/D and Circling Cat C visibility ¼ SM.

MALSR

MISSED APPROACH:
Climb to 2000 then climbing right turn to 2700 direct MKT VOR/DME and hold.

AWOS-3PT 118.175	MINNEAPOLIS CENTER 135.0 306.9	UNICOM 122.725 (CTAF) 0
----------------------------	--	--

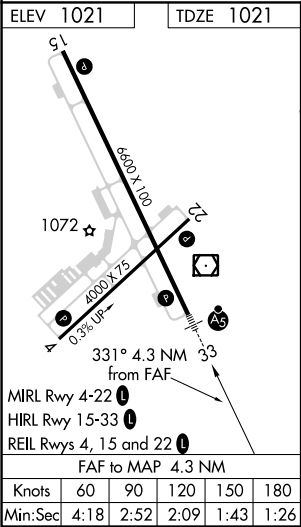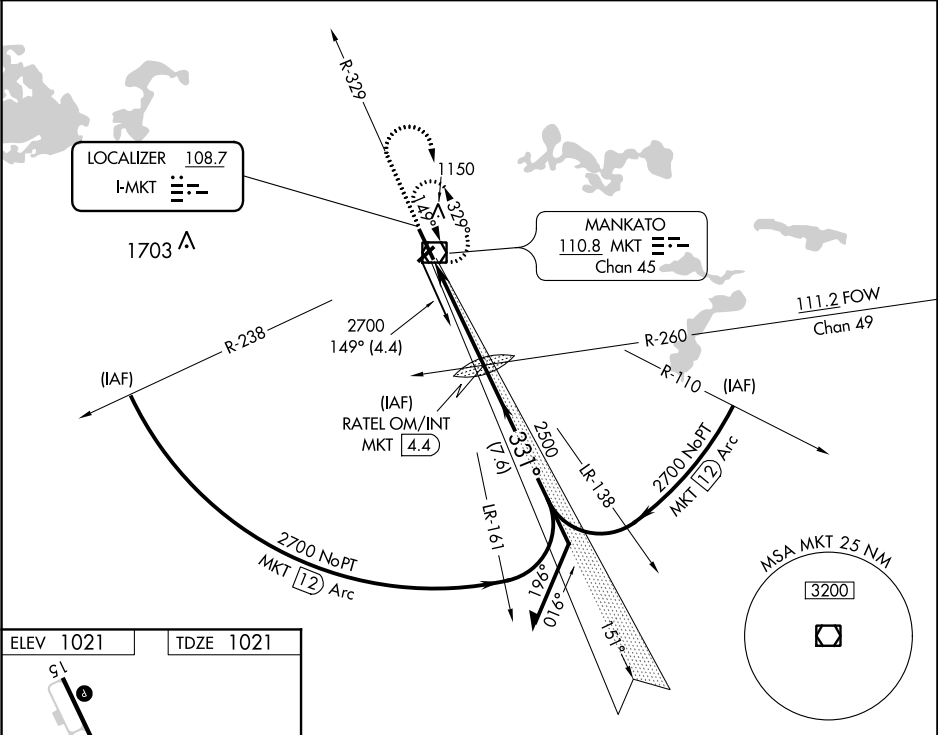

2000	2700	MKT	RATEL OM/INT MKT 4.4	Remain within 10 NM
VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 49).				
GS 3.00° TCH 45				
4.3 NM				
CATEGORY	A	B	C	D
S-ILS 33	1221-½ 200 (200-½)			
S-LOC 33	1420-½ 399 (400-½)		1420-5/8 399 (400-5/8)	
CIRCLING	1460-1 439 (500-1)	1480-1 459 (500-1)	1600-1½ 579 (600-1½)	1600-2 579 (600-2)