

WAAS CH 45615 W15A	APP CRS 151°	Rwy Idg 6600 TDZE 1020 Apt Elev 1021
--	------------------------	---

RNAV (GPS) RWY 15




MANKATO RGNL (MKT)

⚠ Baro-VNAV NA when using Waseca altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F). DME/DME RNP-0.3 NA.

⚠ When local altimeter setting not received, use Waseca altimeter setting; increase LPV DA to 1430 feet, LNAV/VNAV DA to 1473 feet and visibility LPV ¼ SM and LNAV/VNAV ⅓ SM all Cats; increase all MDA 60 feet and visibility LNAV Cat C and D and Circling Cat C ½ SM.

MISSED APPROACH:
Climb to 2900 direct
ANIMY and hold.

AWOS-3PT 118.175	MINNEAPOLIS CENTER 135.0 306.9	UNICOM 122.725 (CTAF) ①
----------------------------	--	-----------------------------------

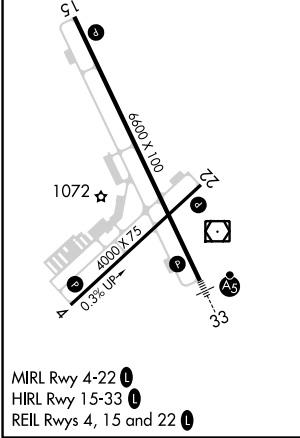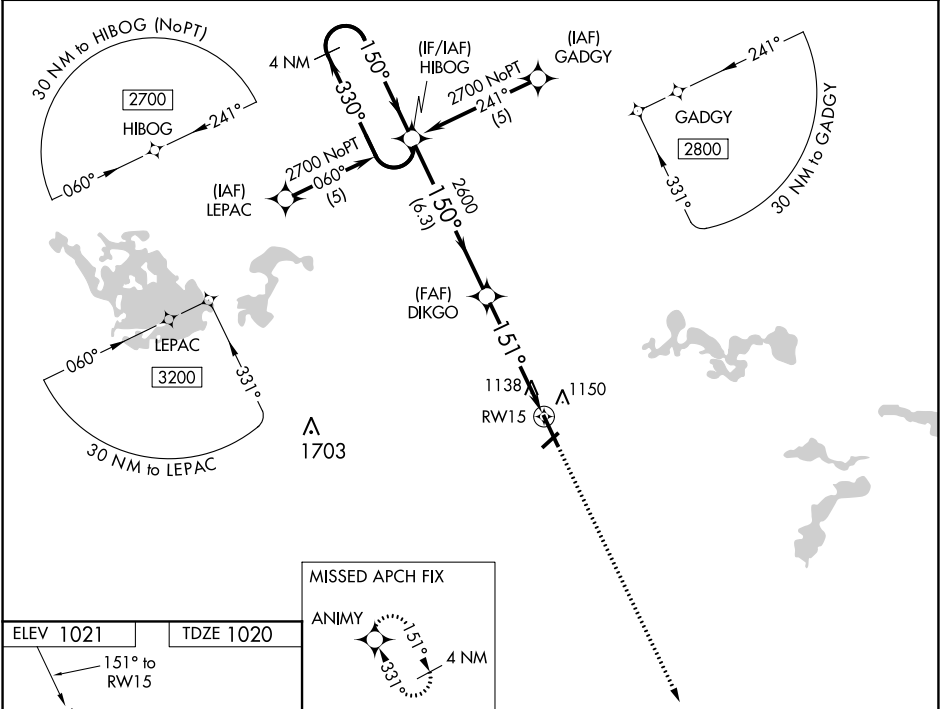

4 NM Holding Pattern		HIBOG	2900	ANIMY
2700		330°	150°	150°
GP 3.00°		2600	151°	151°
TCH 48		6.3 NM	3.7 NM	1 NM
CATEGORY	A	B	C	D
LPV DA		1373-1½	353 (400-1½)	
LNAV/VNAV DA		1416-1¾	396 (400-1¾)	
LNAV MDA		1400-1	380 (400-1)	
CIRCLING	1460-1 439 (500-1)	1480-1 459 (500-1)	1600-1½ 579 (600-1½)	1600-2 579 (600-2)