MMALT FIVE DEPARTURE (RNAV)

(MMALT5.MMALT) 25APR19

BAYTOWN (HPY)

BAYTOWN, TEXAS

CTAF
122.8
HOUSTON DEP CON
134.45 284.0

TAKEOFF MINIMUMS
Rwy 14, 32: Standard with minimum climb of 500' per NM to 540.

TOP ALTITUDE: ASSIGNED BY ATC

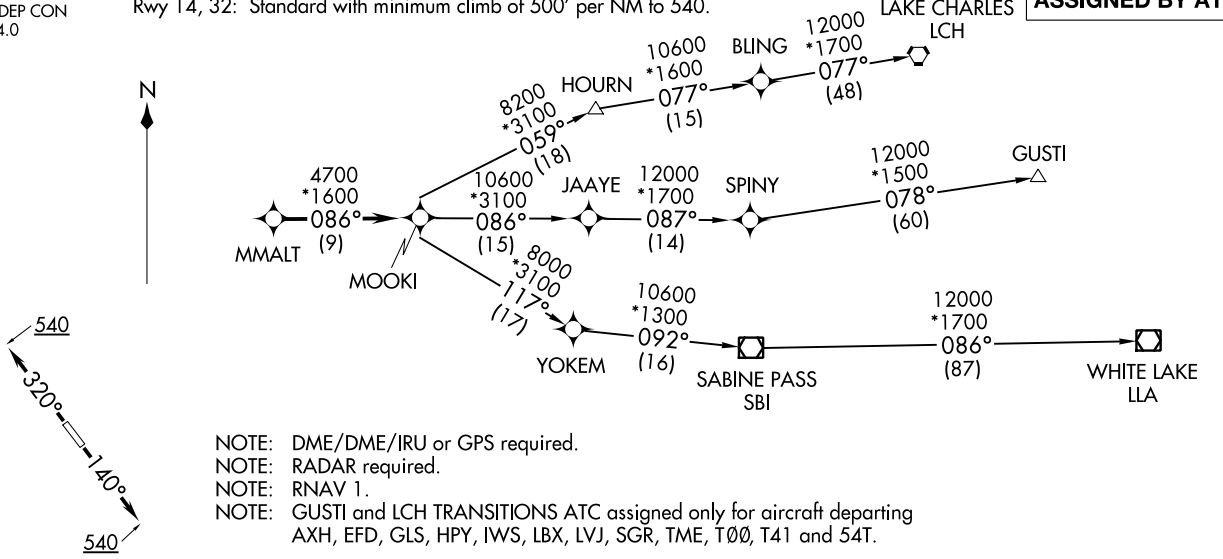

NOTE: DME/DME/IRU or GPS required.
NOTE: RADAR required.
NOTE: RNAV 1.
NOTE: GUSTI and LCH TRANSITIONS ATC assigned only for aircraft departing AXH, EFD, GLS, HPY, IWS, LBX, LVJ, SGR, TME, TØØ, T41 and 54T.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 14: Climb on heading 140° to 540 for RADAR vectors to MMALT, thence. . . .
TAKEOFF RWY 32: Climb on heading 320° to 540 for RADAR vectors to MMALT, thence. . . .

. . . .on track 086° to MOOKI, then on (transition). Maintain ATC assigned altitude.
Expect filed altitude 10 minutes after departure.

GUSTI TRANSITION (MMALT5.GUSTI)
LAKE CHARLES TRANSITION (MMALT5.LCH)
WHITE LAKE TRANSITION (MMALT5.LLA)

(MMALT5.MMALT) 21112
MMALT FIVE DEPARTURE (RNAV)
BAYTOWN (HPY)
BAYTOWN, TEXAS

AL-5757 (FAA)