

LOC/DME I-BXN 111.9 Chan 56	APP CRS 356°	Rwy 36L Idg 13400 TDZE 588 Apt Elev 607	Rwy 36R Idg 13401 TDZE 581 Apt Elev 607
---	------------------------	--	--

ILS or LOC RWY 36L




DALLAS-FORT WORTH INTL (DFW)

▼ Inop table does not apply to Sidestep 36R. Simultaneous approach authorized with Rwy 35L/C/R. DME or RADAR required. For inop ALS, increase S-LOC 36L Cat C and D visibility to 1/2 SM. For inop ALS, increase CIRIS fix minimums Cat C and D visibility to RVR 4500.

Rwys 36L/R MALSRS


MISSED APPROACH: Climb to 1100 then climbing left turn to 3000 on heading 315° and CVE VOR/DME R-298 to KAGLE INT/ CVE VOR/DME 39 DME and HOLD.

D-ATIS ARR 123.775 DEP 135.925	REGIONAL APP CON 118.425	DFW TOWER 126.55 127.5 EAST 124.15 134.9 WEST	GND CON 121.65 121.8 EAST 121.85 WEST	CLNC DEL 128.25	CPDLC
--	------------------------------------	---	---	---------------------------	-------

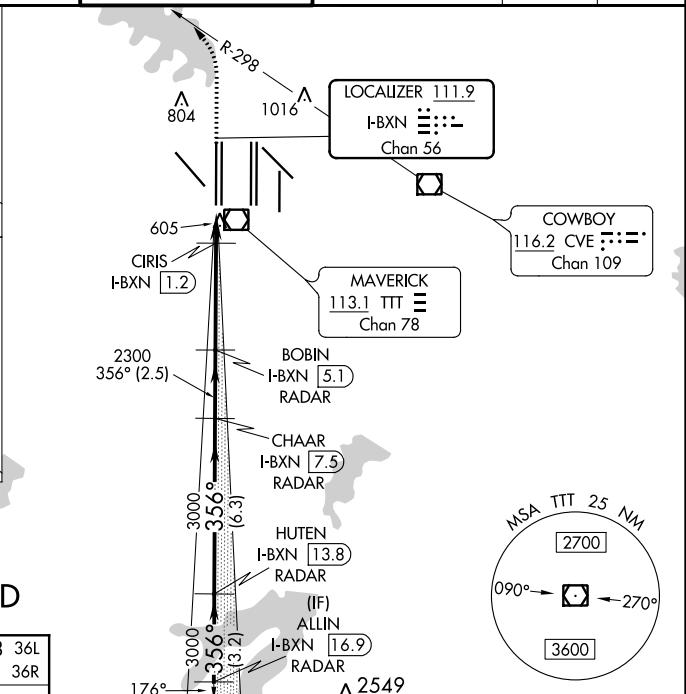

RADAR REQUIRED

ELEV 607	D	TDZE 588 36L
		TDZE 581 36R

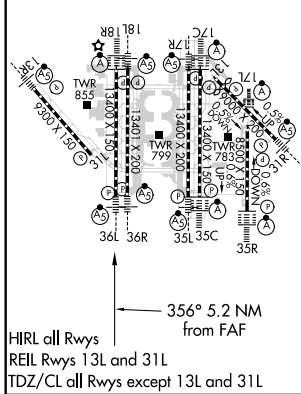

1100	3000	CVE R-298	KAGLE	BOBIN I-BXN 5.1 RADAR	CHAAR I-BXN 7.5 RADAR	HUTEN I-BXN 13.8 RADAR	ALLIN I-BXN 16.9 RADAR
*LOC only		I-BXN DME ANTENNA	CIRIS I-BXN 1.2	2300	3000	3000	4000
		I-BXN 0.2	I-BXN 0.5	*1080	2300	3000	3000
VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 72).							
CATEGORY		A	B	C	D		
S-ILS 36L		788/18		200 (200-1/2)			
S-LOC 36L		1080/24	492 (500-1/2)	1080/50		492 (500-1)	
SIDESTEP 36R		1080/50	499 (500-1)	1080-1 1/2		499 (500-1 1/2)	
CIRIS FIX MINIMUMS (DME required)							
S-LOC 36L		880/24		292 (300-1/2)			