


|                                        |                        |                             |                                           |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|
| WAAS<br>CH <b>70443</b><br><b>W15A</b> | APP CRS<br><b>148°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>5000</b><br><b>3943</b><br><b>3947</b> |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|

RNAV (GPS) RWY 15

CHOTEAU (CII)

|           |                                                                                |                                                       |
|-----------|--------------------------------------------------------------------------------|-------------------------------------------------------|
| RNP APCH. |                                                                                |                                                       |
| NA        | For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22° C or above 54° C. | MISSED APPROACH: Climb to 6200 direct CALAD and hold. |

|                          |                                             |                                 |
|--------------------------|---------------------------------------------|---------------------------------|
| AWOS-2<br><b>119.275</b> | SALT LAKE CITY CENTER<br><b>133.4 285.4</b> | UNICOM<br><b>122.8 (CTAF) 1</b> |
|--------------------------|---------------------------------------------|---------------------------------|

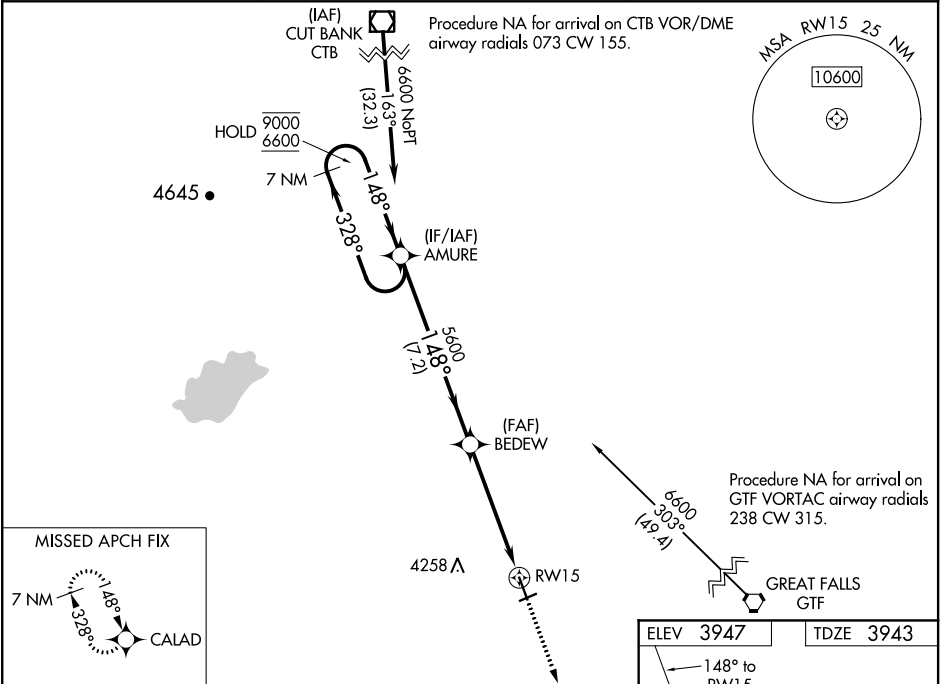

|                                                                  |                    |                            |                     |
|------------------------------------------------------------------|--------------------|----------------------------|---------------------|
| VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 24). |                    | 6200                       | CALAD               |
| 7 NM Holding Pattern                                             |                    | AMURE                      | BEDEW               |
| 9000<br>6600                                                     | ← 328°<br>148° →   | 5600                       | * 1.4 NM to RW15    |
| GP 3.00°<br>TCH 45                                               |                    | 5600                       | * LNAV only         |
|                                                                  |                    | 7.2 NM                     | 3.7 NM              |
| CATEGORY                                                         | A                  | B                          | C                   |
| LPV DA                                                           | 4143-1 200 (200-1) |                            |                     |
| LNAV/VNAV DA                                                     | 4193-1 250 (300-1) |                            |                     |
| LNAV MDA                                                         | 4420-1 477 (500-1) | 4420-1 3/8 477 (500-1 3/8) |                     |
| CIRCLING                                                         | 4440-1 493 (500-1) | 4600-1 3/4 653 (700-1 3/4) | 4900-3 953 (1000-3) |

