

WAAS CH 42628 W07A	APP CRS 074°	Rwy Idg TDZE 1112 Apt Elev 1122
--	------------------------	---

RNAV (GPS) RWY 7

BELLEFONTAINE RGNL (ED.J)


▼

▲ NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 37°C (98°F). DME/DME RNP-0.3 NA. VDP and Baro-VNAV NA with James M. Cox Dayton Intl altimeter setting. When local altimeter setting not received, use James M. Cox Dayton Intl altimeter setting: increase LPV DA to 1456 feet, LNAV/VNAV DA to 1598 feet, and all MDAs 100 feet, and increase LPV and LNAV/VNAV all Cats visibility ¼ SM, LNAV Cats C and D visibility ⅓ SM, and Circling Cat C visibility ½ SM and Cat D visibility ¼ SM.

MISSED APPROACH:
Climb to 1600 then climbing left turn to 3000 direct BUTYN and hold.

AWOS-3 118.075	COLUMBUS APP CON 118.425 294.5	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

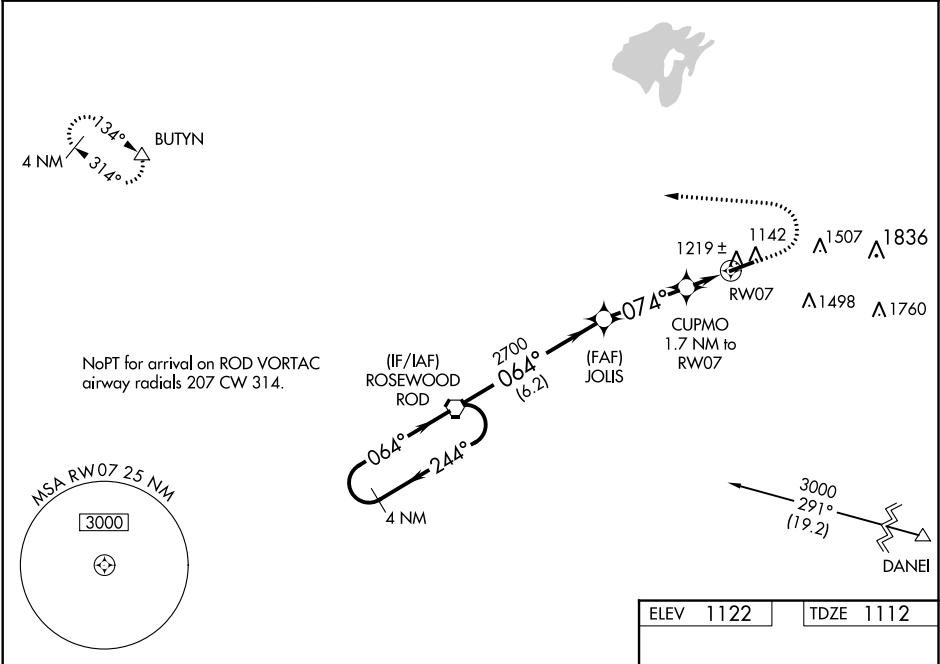

4 NM Holding Pattern		ROD VORTAC		1600	3000	BUTYN
3000 ← 244°		→ 064°		* LNAV only.		
GP 3.00°		TCH 41		CUPMO 1.7 NM to RW07		
		2700		* 1.1 NM to RW07		
		JOLIS		RW07		
		2700		* 1680		
		6.2 NM		0.7 NM 1.1 NM		
CATEGORY	A	B	C	D		
LPV DA	1362-7⁄8		250 (300-7⁄8)			
LNAV/VNAV DA	1504-13⁄8		392 (400-13⁄8)			
LNAV MDA	1480-1		368 (400-1)			
CIRCLING	1620-1 498 (500-1)	1640-1 518 (600-1)	1860-2 738 (800-2)	1980-2 3⁄4 858 (900-2 3⁄4)		

ELEV 1122

TDZE 1112

074° to RW07

5000 X 100

0.4% UP

1178

MIRL Rwy 7-25 0
REIL Rwy 7 and 25 0