

WAAS CH 70709 W35D	APP CRS 350°	Rwy Idg TDZE Apt Elev	7800 480 501
--	------------------------	-----------------------------	---

RNAV (GPS) Y RWY 35R

LOUISVILLE MUHAMMAD ALI INTL (SDF)

RNP APCH.

⚠

Circling Rwy 11 NA at night. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 1½ SM.



ALSIF-2

ⓘ

ⓘ

MISSED APPROACH:
Climb to 1600 then climbing right turn to 4000 direct TORAC and hold.

D-ATIS 118.725	LOUISVILLE APP CON 132.075 327.0	LOUISVILLE TOWER 124.2 257.8	GND CON 121.7 348.6	CLNC DEL 126.1 275.8	CPDLC
--------------------------	--	--	-------------------------------	--------------------------------	-------

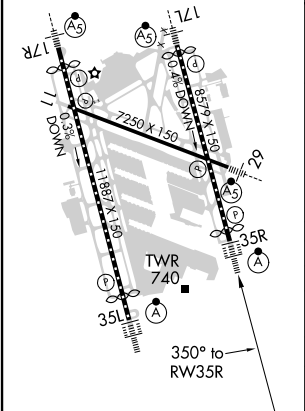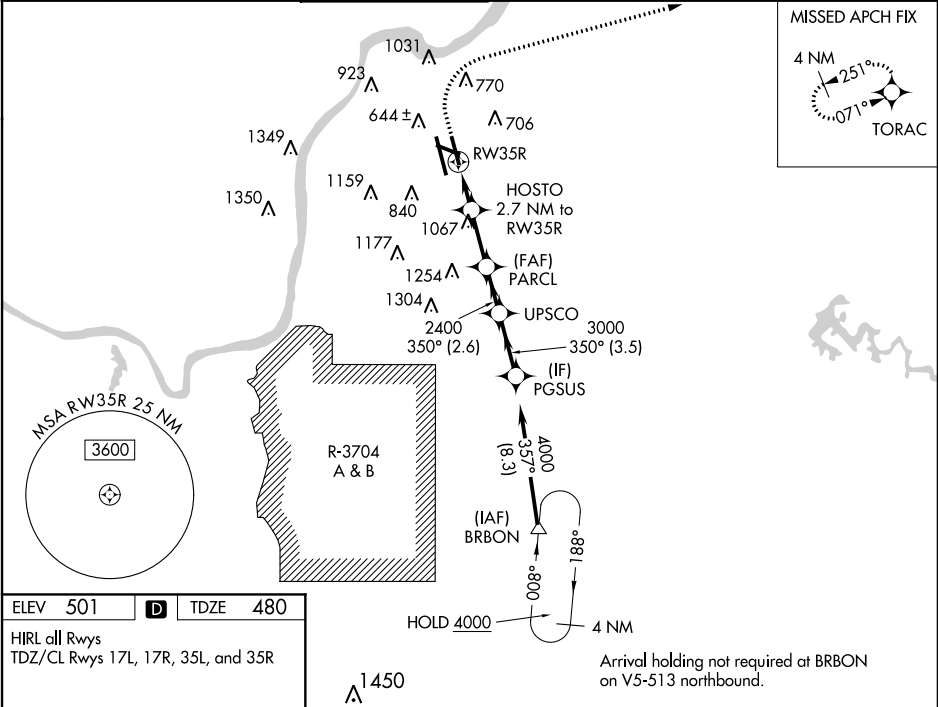

ELEV	501	D	TDZE	480
HIRL all Rwy TDZ/CL Rwy 17L, 17R, 35L, and 35R				
CATEGORY	A	B	C	D
LPV DA	680/18		200 (200-½)	
LNAV/VNAV DA	909/50		429 (500-1)	
LNAV MDA	1000/24	520 (500-½)	1000/55	520 (500-1)
CIRCLING	1040-1 539 (600-1)	1140-1 639 (700-1)	1160-1¾ 659 (700-1¾)	1400-3 899 (900-3)