


|                           |                        |                        |                    |
|---------------------------|------------------------|------------------------|--------------------|
| LOC I-MSL<br><b>109.7</b> | APP CRS<br><b>297°</b> | Rwy Idg<br>6694        | TDZE<br><b>551</b> |
|                           |                        | Apt Elev<br><b>551</b> |                    |

# ILS Z or LOC Z RWY 30


NORTHWEST ALABAMA RGNL (MSL)

DME required. RADAR required for procedure entry.



⚠ When local altimeter setting not received, use Decatur altimeter setting: Increase DA to 833 feet and all MDA 100 feet; Increase S-LOC 30 Cat C, D visibility 3/8 SM and Circling Cat C, D visibility 1/2 SM. DME from MSL VORTAC. Simultaneous reception of I-MSL and MSL DME required. For inop ALS increase S-LOC 30 Cats C/D visibility to 1 SM. For inop ALS when using Decatur altimeter setting, increase S-ILS 30 all Cats visibility to 3/8 SM, and increase S-LOC 30 Cats C/D to 1 3/8 SM.

MALSR  MISSED APPROACH: Climb to 3000 on MSL VORTAC R-292 to JOBTA/MSL VORTAC 19 DME and hold.

|                        |                                      |                       |                                  |
|------------------------|--------------------------------------|-----------------------|----------------------------------|
| ASOS<br><b>119.425</b> | MEMPHIS CENTER<br><b>120.8 307.0</b> | GCO<br><b>121.725</b> | UNICOM<br><b>123.05 (CTAF) 0</b> |
|------------------------|--------------------------------------|-----------------------|----------------------------------|

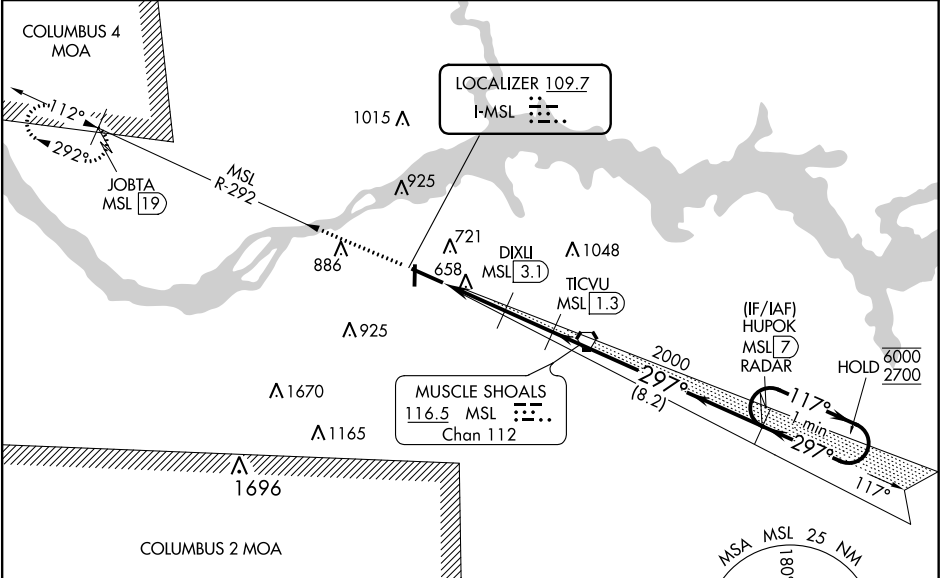

|          |          |
|----------|----------|
| ELEV 551 | TDZE 551 |
|----------|----------|

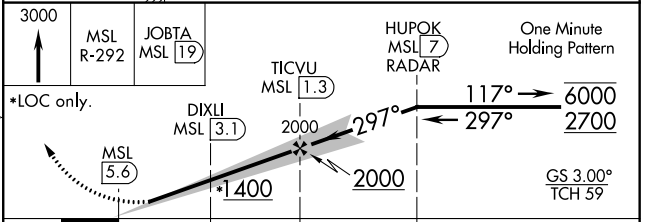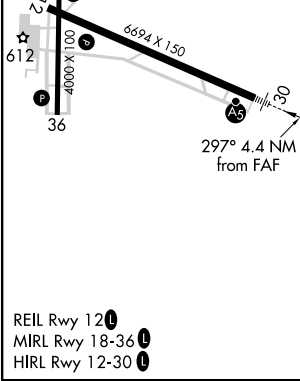

| CATEGORY          | A       | B             | C                     | D                             |
|-------------------|---------|---------------|-----------------------|-------------------------------|
| S-ILS 30          | 751-1/2 |               | 200 (200-1/2)         |                               |
| S-LOC 30          | 920-1/2 | 369 (400-1/2) | 920-5/8               | 369 (400-5/8)                 |
| <b>C</b> CIRCLING | 1040-1  | 489 (500-1)   | 1280-2<br>729 (800-2) | 1280-2 1/4<br>729 (800-2 1/4) |

SE-4, 16 JUN 2022 to 14 JUL 2022

SE-4, 16 JUN 2022 to 14 JUL 2022