
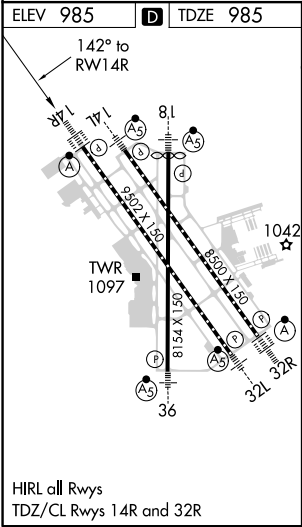


WAAS CH 56217 W14A	APP CRS 142°	Rwy Idg TDZE Apt Elev	9502 985 985
--	------------------------	-----------------------------	---

RNAV (GPS) Y RWY 14R

EPPLEY AIRFIELD (OMA)

RNP APCH.		ALSIF-2		MISSED APPROACH: Climb to 3000 direct HETAN and on track 135° to OVR VORTAC and hold.	
▼ ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F). For inop ALS, increase LNAV/VNAV all Cats visibility to 1½ SM.		A			
D-ATIS 120.4	OMAHA APP CON 120.1 354.05	OMAHA TOWER 132.1 256.9	GND CON 121.9		CLNC DEL 119.9

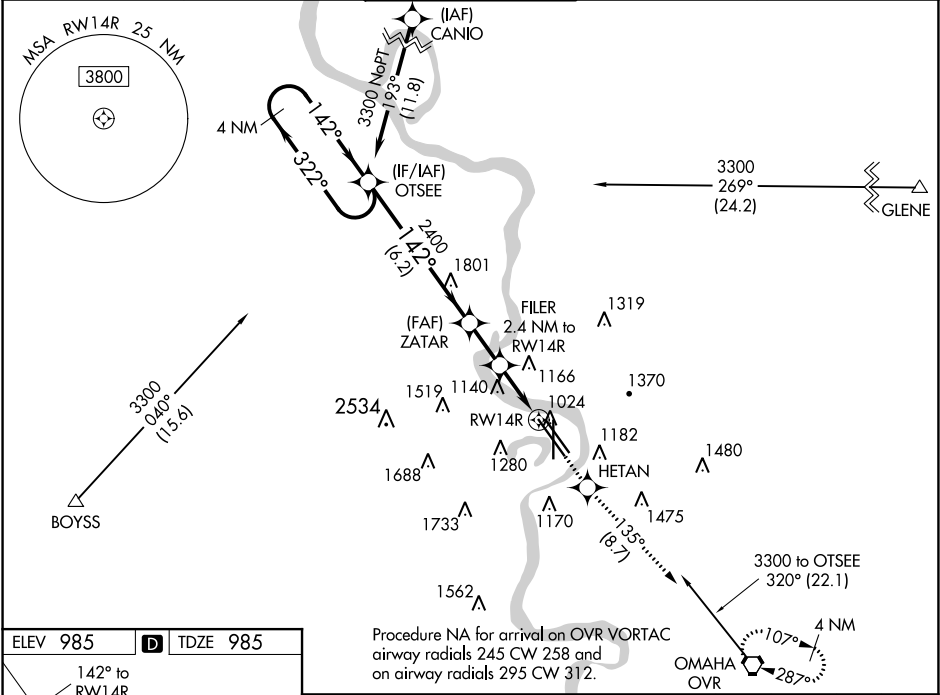

OTSEE		ZATAR		3000	HETAN	OVR
4 NM Holding Pattern		2400		↑	✧	tr 135°
3300		142°		*LNAV only		
322°		2400		FILER 2.4 NM to RW14R *1.1 NM to RW14R		
GP 3.00° TCH 57		*1800		RW14R		
6.2 NM		1.9 NM		1.3 NM		
1.1 NM						
CATEGORY	A	B	C	D		
LPV DA	1185/18		200 (200-½)			
LNAV/VNAV DA	1465/50		480 (500-1)			
LNAV MDA	1380/24	395 (400-½)		1380/35	395 (400-¾)	
CIRCLING	1660-1 675 (700-1)	1680-1 695 (700-1)	2000-3 1015 (1100-3)	2040-3 1055 (1100-3)		

NC-2, 16 JUN 2022 to 14 JUL 2022

NC-2, 16 JUN 2022 to 14 JUL 2022