

PANAMA CITY, FLORIDA

RNAV (GPS) RWY 14L

WAAS CH 71271 W14A	APCH CRS 138°	Rwy ldg 10,008 TDZE 14 Arprt Elev 17
--------------------------	------------------	--

AL-312 (USAF)

TYNDALL AFB (KPM)

⚠ * When ALS inop increase RVR to 40, vis to 3/4 mile.
** When ALS inop increase RVR to 45, vis to 7/8 mile.
*** When ALS inop increase CAT AB RVR to 55, vis to 1 mile; CAT CDE vis to 1 3/8 miles.

ALS-F-1


MISSED APPROACH: Climb to 600 then climbing left turn to 3000 direct NENCY and hold.

ATIS★ 254.4	APP CON/DEP CON 119.775 317.45 BLW 5000' 124.15 338.35 ABV 5000'	TOWER★ 133.95 263.15	GND CON 121.9 259.3	CLNC DEL 118.05 348.7	ASR/PAR
----------------	--	-------------------------	------------------------	--------------------------	---------

RNP APCH

For uncompensated
Baro-VNAV systems,
Procedure NA below
15°C (59°F) or
above 54°C (130°F).

Average Cold Temperature
based on standard
-30.00°C ISA deviation.

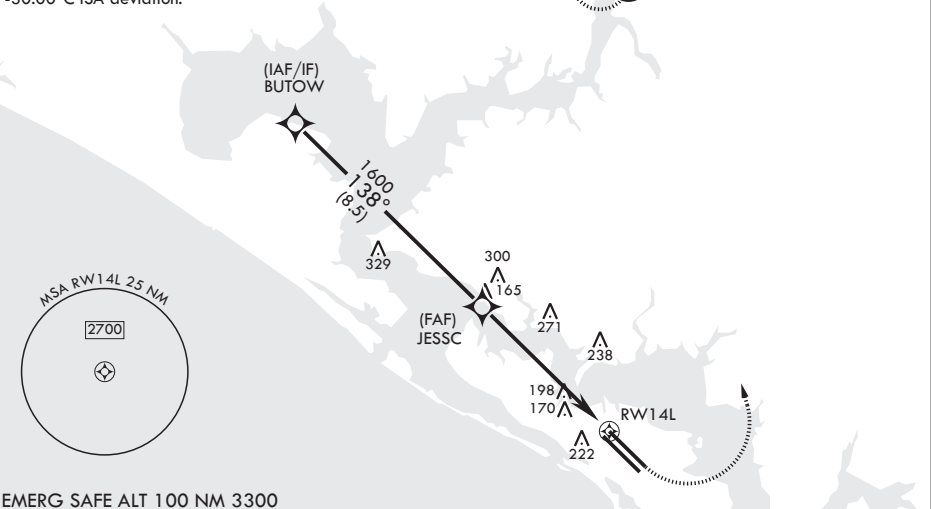

BUTOW

3000

138°

JESSC

1600

GP 2.50°
TCH 51

600

3000

NENCY

ELEV 17

TDZE 14

138° to RWY 14L

Rwy 32L ldg 9135'

CATEGORY	A	B	C	D	E
LPV DA*	214/24		200	(200-½)	
LNAV/VNAV DA**	276/24 262 (300-½)	287/24 273 (300-½)	295/24 281 (300-½)	306/24	292 (300-½)
LNAV MDA***	500/24 486 (500-½)		500/50	486	(500-1)
C CIRCLING	540-1 523 (600-1)		540-1½ 523 (600-½)	580-2 563 (600-2)	620-2¼ 603 (700-2¼)

HIRL all Rwys
Recommend Rwy 14L-32R for
apch end engagement of A-Gear.

PANAMA CITY, FLORIDA

30°04'N - 85°34'W

TYNDALL AFB (KPM)

Amtrd 4 20MAY21

RNAV (GPS) RWY 14L

SE-3, 16 JUN 2022 to 14 JUL 2022

SE-3, 16 JUN 2022 to 14 JUL 2022