
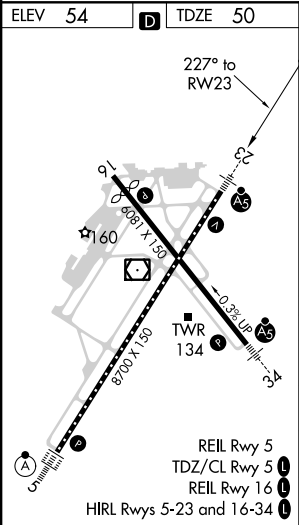


WAAS CH 93823 W23A	APP CRS 227°	Rwy Idg TDZE Apt Elev	8700 50 54
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) Y RWY 23

RHODE ISLAND TF GREEN INTL (PVD)

RNP APCH. For uncompensated Baro-VNAV systems, procedure NA below -17°C or above 54°C. For inop ALS, increase LNAV Cats C/D visibility to RVR 6000. ** RVR 1800 authorized with use of FD or AP or HUD to DA.		MALSR 	MISSED APPROACH: Climb to 1700 then climbing right turn to 2500 direct FOSTY and hold.	
D-ATIS 124.2	PROVIDENCE APP CON * 123.675 244.875	PROVIDENCE TOWER * 120.7 (CTAF) 0 257.8	GND CON 121.9 348.6	CLNC DEL 126.65 348.6

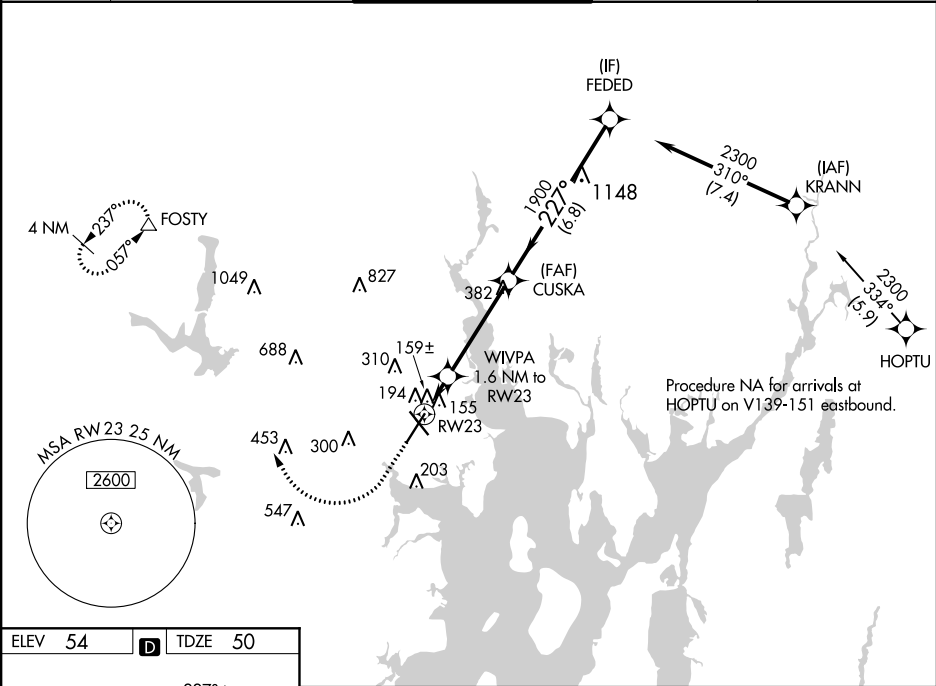

ELEV 54	TDZE 50	1700 2500 FOSTY VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 41).			
*LNAV only		WIVPA 1.6 NM to RW23 CUSKA 1900 FEDED 2300 GP 3.00° TCH 51			
RW23		1 NM to RW23 *600			
1 NM		0.6 NM 4.1 NM 6.8 NM			
CATEGORY	A	B	C	D	
LPV DA **	250/24		200 (200-½)		
LNAV/VNAV DA	346/24		296 (300-½)		
LNAV MDA	460/24	410 (500-½)	460/40	410 (500-¾)	
CIRCLING	560-1 506 (600-1)	640-1 586 (600-1)	640-1½ 586 (600-1½)	860-2½ 806 (900-2½)	