

WAAS CH 40015 W28A	APP CRS 277°	Rwy Idg 9351 TDZE 50 Apt Elev 50
--	------------------------	---

RNAV (GPS) Z RWY 28
SAVANNAH/HILTON HEAD INTL (SAV)


RNP APCH.




For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 49°C (120°F).

MISSED APPROACH: Climb to 2600 direct TLEE and hold.

ATIS 123.75	SAVANNAH APP CON ★ 125.3 371.875	SAVANNAH TOWER ★ 119.1 (CTAF) 0 257.8	GND CON 121.9 348.6	CLNC DEL 119.55 291.775	UNICOM 122.95
----------------	-------------------------------------	--	------------------------	----------------------------	------------------

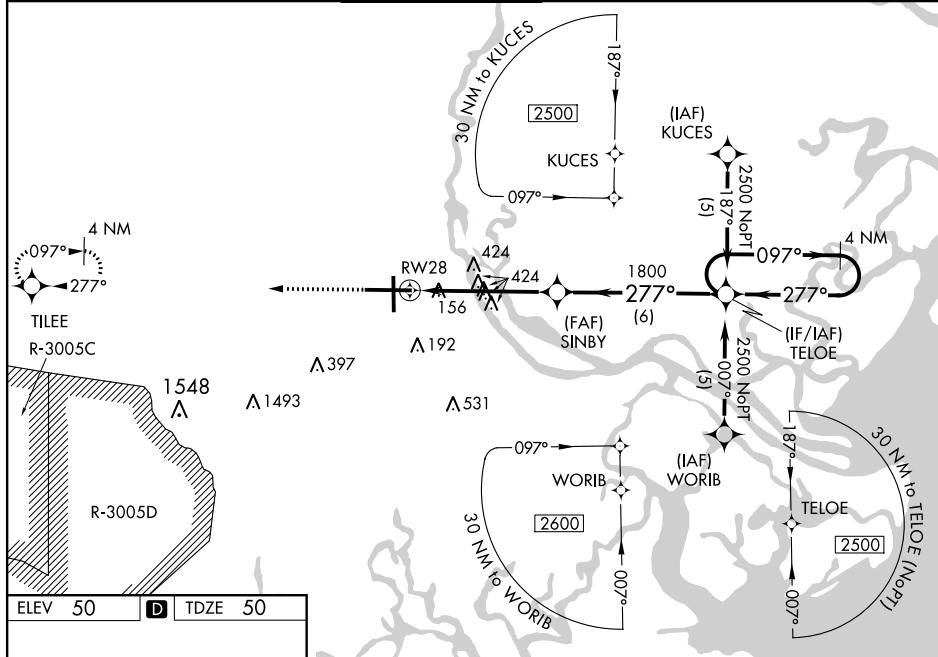

ELEV 50	D	TDZE 50
---------	----------	---------



TDZ/CL Rwy 10
REIL Rwy 19 and 28 **L**
HIRL Rwy 1-19 and 10-28 **L**

2600
↑
TILEE

VGS1 and RNAV glidepath not coincident
(VGS1 Angle 3.00/TCH 66).

*LNAV only.

1.8 NM to RW28

1800

SINBY

TELOE

4 NM Holding Pattern

097° → 2500

← 277°

1800

GP 3.00°
TCH 52

1.8 NM 3.5 NM 6 NM

CATEGORY	A	B	C	D
LPV DA	307-1 257 (300-1)			
LNAV/VNAV DA	431-1¼ 381 (400-1¼)			
LNAV MDA	680-1 630 (700-1)		680-1¾ 630 (700-1¾)	
CIRCLING	680-1 630 (700-1)		740-2 690 (700-2)	740-2¼ 690 (700-2¼)