

WAAS CH 81920 W03A	APP CRS 031°	Rwy Idg TDZE 2385 Apt Elev 2385	11002 2385 2385
--	------------------------	---	--

RNAV (GPS) Y RWY 3


SPOKANE INTL (GEG)

RNP APCH.
⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 53°C. For inop ALS increase LNAV/VNAV all Cats visibility to 1½ SM and increase LNAV Cats C and D visibility to 1¼ SM.


ALSF-2
ⓐ

MISSED APPROACH: Climb to 8200 direct LUCEV and hold, continue climb-in-hold to 8200.

ATIS 124.325 254.375	SPOKANE APP CON 123.75 282.25 (205°-025°) 133.35 263.0 (026°-204°)	SPOKANE TOWER 118.3 278.3	GND CON 121.9 348.6	CLNC DEL 127.55
--------------------------------	--	-------------------------------------	-------------------------------	---------------------------

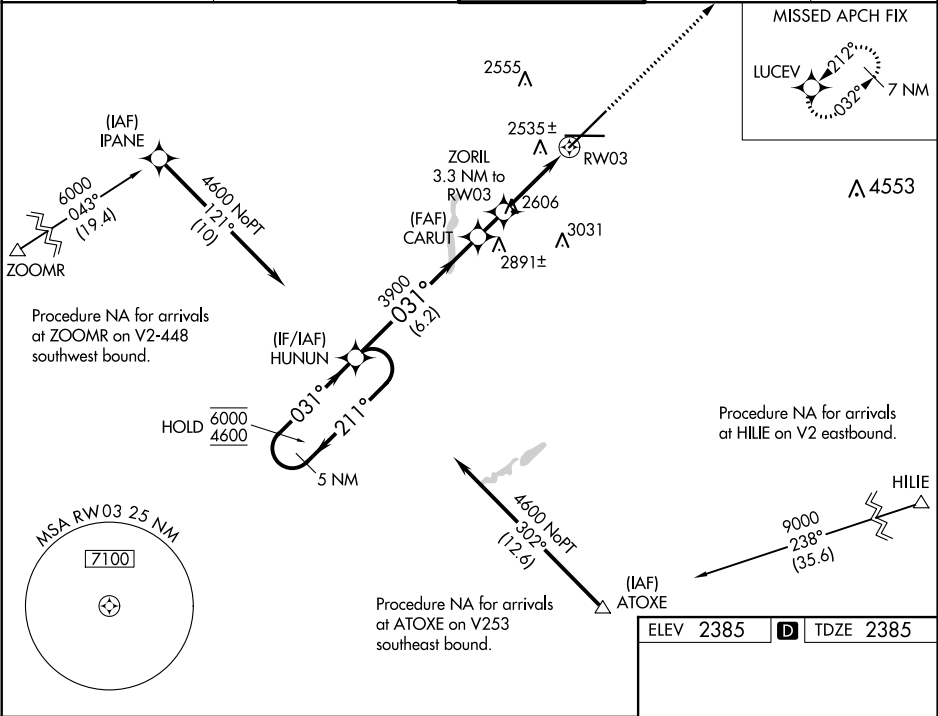

5 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 69).		8200	LUCEV
				*LNAV only.	
GP 3.00° TCH 55		6.2 NM		1.3 NM	1.5 NM
CATEGORY	A	B	C	D	
LPV DA	2585/18		200 (200-½)		
LNAV/VNAV DA	2962-1½		577 (600-½)		
LNAV MDA	3020/24 635 (700-½)		3020/60 635 (700-¼)	3020-1½ 635 (700-1½)	

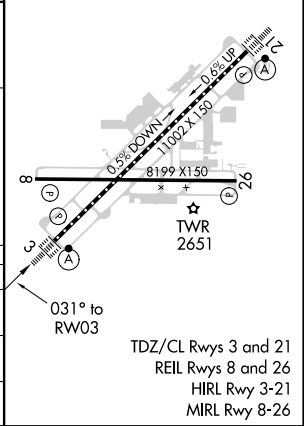

NW-1, 16 JUN 2022 to 14 JUL 2022

NW-1, 16 JUN 2022 to 14 JUL 2022