


WAAS CH 69420 W32A	APP CRS 322°	Rwy Idg 5103 TDZE 516 Apt Elev 516
--	------------------------	---


RNAV (GPS) RWY 32
WACO RGNL (ACT)

	DME/DME RNP-0.3 NA. When local altimeter setting not received use Mc Gregor Exec altimeter setting and increase all DA 31 feet and all MDA 40 feet; increase LPV and LNAV/VNAV all Cats and LNAV Cats C/D visibility 1/8 mile and Circling Cat D visibility 1/4 mile. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C (9°F) or above 54°C (130°F). Baro-VNAV NA when using Mc Gregor Exec altimeter setting. VDP NA with Mc Gregor Exec altimeter setting.
	
ASR	

MISSED APPROACH:
Climb to 4000 direct
EVVIS and hold,
continue climb-in-hold
to 4000.

ATIS 123.85	WACO APP CON ★ 127.65 227.125	WACO TOWER ★ 119.3 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
-----------------------	---	---	-------------------------	-------------------------

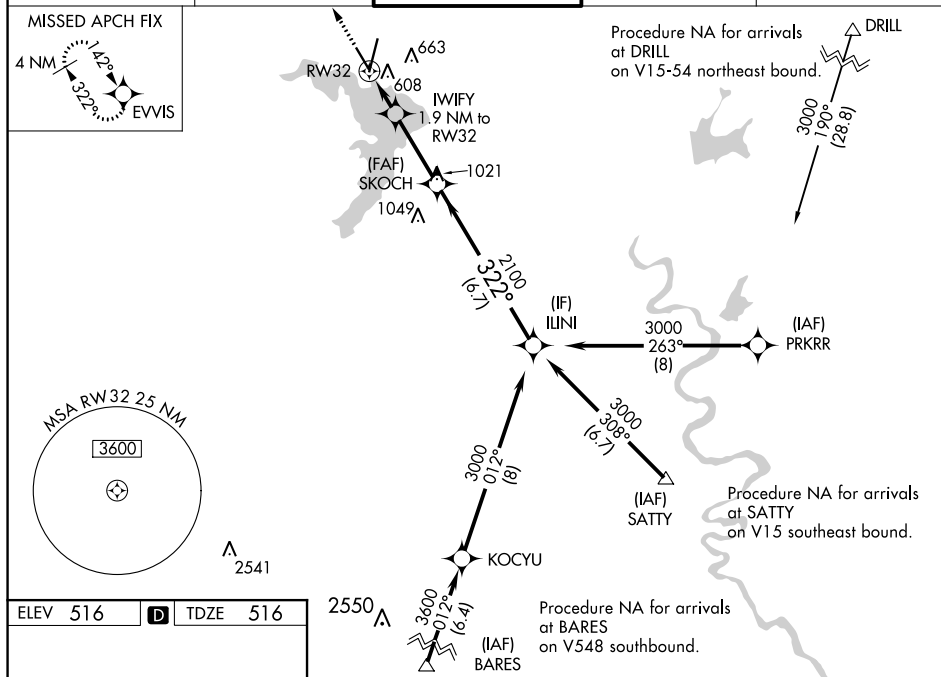

4000 ↑		EVVIS 				
*LNAV only.		IWIFY 1.9 NM to RW32		SKOCH 2100		
		*1160		322° 2100		
		GP 3.00° TCH 59		3000		
0.9		1.0		2.9 NM		
				6.7 NM		
CATEGORY	A		B		C	D
LPV DA			766- ³ / ₄ 250 (300- ³ / ₄)			
LNAV/ VNAV DA			773- ³ / ₄ 257 (300- ³ / ₄)			
LNAV MDA			860-1 344 (400-1)			
 CIRCLING	940-1 424 (500-1)		980-1 464 (500-1)		1020-1½ 504 (600-1½)	
					1160-2 644 (700-2)	