


| | | |
|-------------|----------|--------------|
| APP CRS | Rwy Idg | 12312 |
| 079° | TDZE | 13 |
| | Apt Elev | 13 |

RNAV (RNP) Z RWY 8L


DANIEL K INOUYE INTL (HNL) (PHNL)

| | | |
|-------------------------------------------------------------------------------|-------|---------------------------------------------------------------------------------------|
| RNP AR APCH. | MALSR | MISSED APPROACH: Climb to 420 then climbing right turn to 3000 direct ALANA and hold. |
| ▼ For uncompensated Baro-VNAV systems, procedure NA below 17°C or above 54°C. | | |

| | | | | |
|---------------------|--------------------|---------------------------------------------------------|--------------------|--------------------|
| D-ATIS | HCF APPROACH | HONOLULU TOWER | GND CON | CLNC DEL |
| 127.9 251.15 | 118.3 269.0 | 118.1 257.8 123.9 273.575 (Rwy 8R/26L) | 121.9 348.6 | 121.4 281.4 |

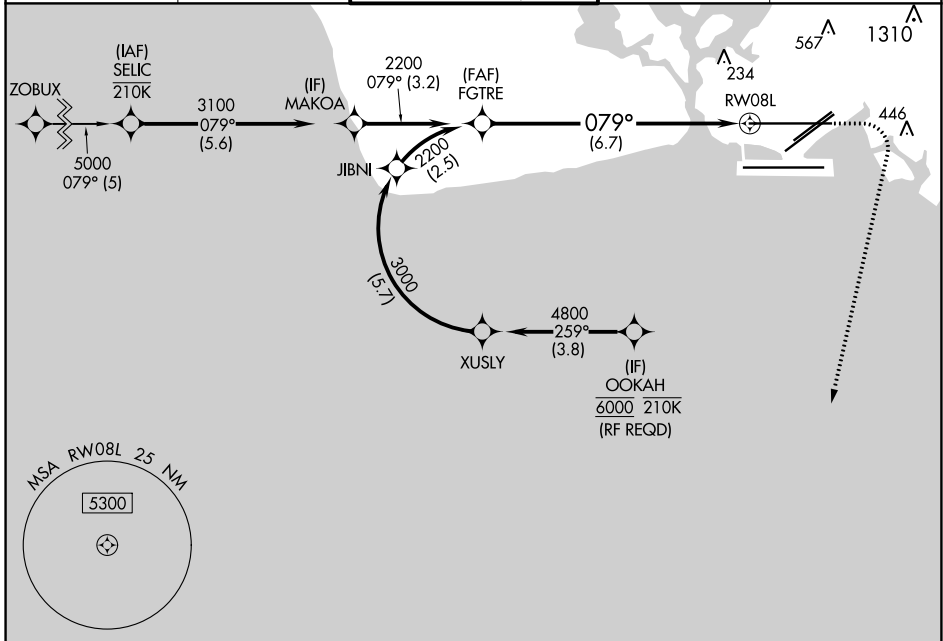

| | | |
|---------|----------|---------|
| ELEV 13 | D | TDZE 13 |
|---------|----------|---------|

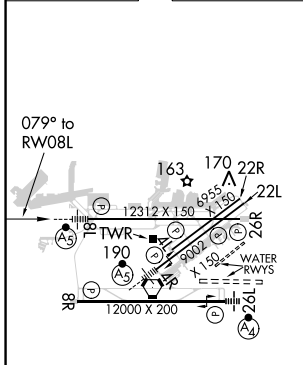

WATER RWYS:
8W-26W 5090 X 300
4W-22W 3000 X 150

REIL Rwy 4L, 8R, 22L, 22R and 26R
HIRL Rwy 4L-22R, 4R-22L, 8L-26R and 8R-26L

| | | | | |
|-------------------------------------------------------------------------------------------------------------------------------------|-------------------|------|-------|---|
| <p>ALANA</p> <p>GP 3.00° TCH 56</p> <p>MAKOA 3100</p> <p>FGTR 2200</p> <p>RWY 8L</p> <p>See planview for multiple IF locations.</p> | | | | |
| GP 3.00° | 420 | 3000 | ALANA | |
| TCH 56 | | | | |
| CATEGORY | A | B | C | D |
| RNP 0.30 DA | 343-½ 330 (400-½) | | | |

AUTHORIZATION REQUIRED