

LOC I-BWI	APP CRS	Rwy Idg	5000
111.95	335°	TDZE	124
		Apt Elev	143

BALTIMORE/

WASHINGTON INTL THURGOOD MARSHALL (BWI)



ILS or LOC RWY 33R

▼ DME required. DME from BAL VORTAC. Simultaneous reception of I-BWI and BAL DME required. Simultaneous approach authorized with Rwy 33L. Inoperative table does not apply to S-ILS 33R. For inoperative MALSR, increase S-LOC 33R visibility to RVR 5000. Helicopter visibility reduction below RVR 4000 NA.

MALSR

MISSED APPROACH: Climb to 3000 on heading 335° and BAL VORTAC R-337 to KRENE/BAL 12.9 DME and hold.

D-ATIS	POTOMAC APP CON	BALTIMORE TOWER	GND CON	CLNC DEL
115.1 127.8	119.0 282.275 (020°-100°) 119.7 290.475 (131°-180°) 124.55 317.425 (101°-130°) 128.7 307.9 (181°-019°)	119.4 257.8	121.9	118.05

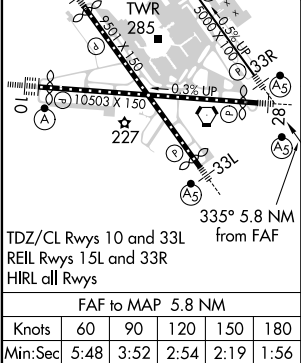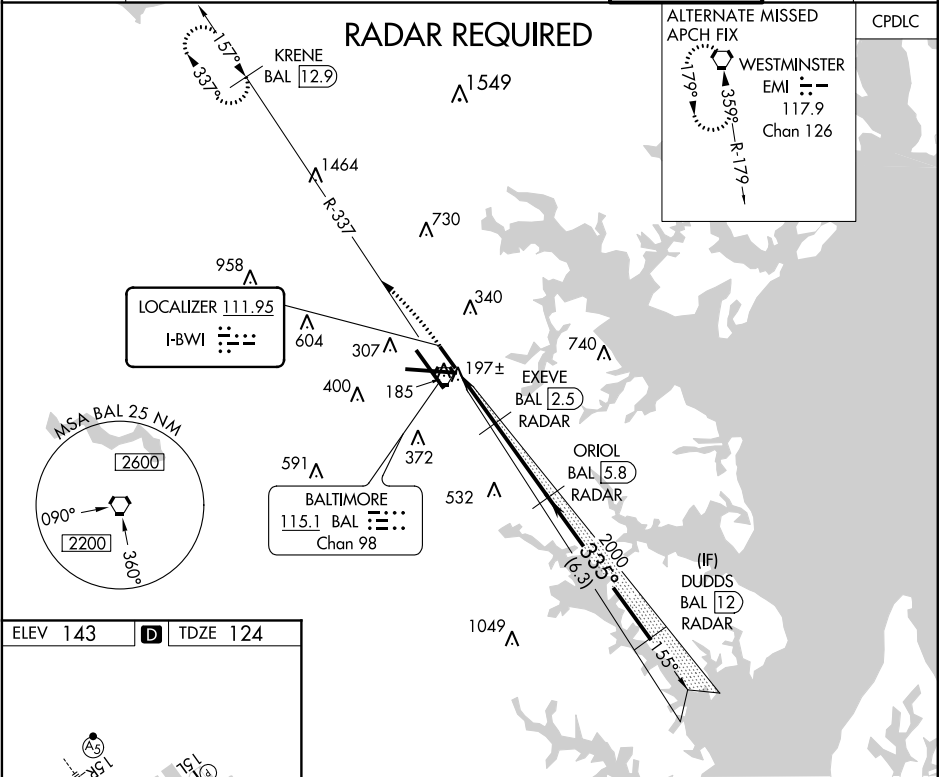

3000	BAL R-337	KRENE BAL 12.9	ORiol BAL 5.8 RADAR	DUDDS BAL 12 RADAR
hdg 335°				
*LOC only.	*BAL 1.3	EXEVE BAL 2.5 RADAR	2000	3000
			335°	
	1.2 NM	1.3 NM	3.3 NM	6.3 NM
CATEGORY	A	B	C	D
S-ILS 33R	333/40	209 (200-¾)		NA
S-LOC 33R	540/40	416 (400-¾)		NA
	640-1	660-1		
✶ CIRCLING	497 (500-1)	517 (600-1)		NA