
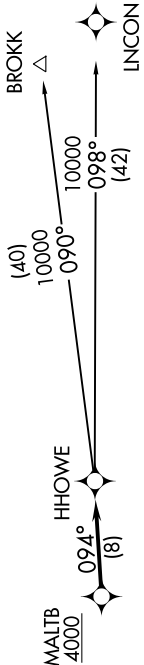


AWOS-3  
119.675  
CTAF  
123.0  
DETROIT DEP CON  
134.3 284.0

TOP ALTITUDE:  
ASSIGNED BY ATC

NOTE: RNAV 1.  
NOTE: RADAR required.  
NOTE: DME/DME/IRU or GPS required.  
NOTE: Turbojet departures at/above 10000, maintain 280K until advised by ATC.  
NOTE: BROKK TRANSITION: For use by flights filed at or below FL270, or as assigned by ATC.

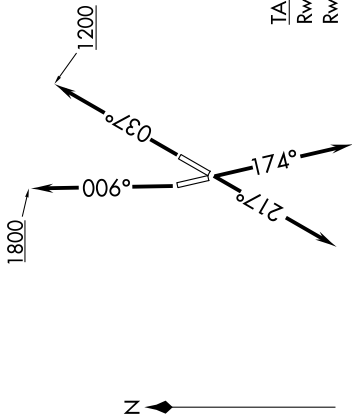

TAKEOFF MINIMUMS:  
Rwys 4, 17, 22: Standard.  
Rwy 35: Standard with minimum climb of 500' per NM to 1100.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 4: Climb on heading 037° to 1200 then as assigned for RADAR vectors to cross MALTB at or above 4000, thence....  
TAKEOFF RUNWAY 17: Climb on heading 174° or as assigned for RADAR vectors to cross MALTB at or above 4000, thence....  
TAKEOFF RUNWAY 22: Climb on heading 217° or as assigned for RADAR vectors to cross MALTB at or above 4000, thence....  
TAKEOFF RUNWAY 35: Climb on heading 006° to 1800 then as assigned for RADAR vectors to cross MALTB at or above 4000, thence....

....on track 094° to HHOWE, then on (transition). Maintain ATC assigned altitude, expect filed altitude 10 minutes after departure.

BROKK TRANSITION (HHOWE3.BROKK)  
LINCON TRANSITION (HHOWE3.LINCON)