

WAAS
CH **53537**
W21A

APP CRS
205°

Rwy Idg
TDZE **935**
Apt Elev **937**

RNAV (GPS) RWY 21

DELAWARE COUNTY RGNL (MIE)


⚠

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Fort Wayne Intl altimeter setting and increase all DA 121 feet and all MDA 140 feet; increase LPV all Cats and LNAV Cats C/D visibility ¾ mile and LNAV/VNAV all Cats and Circling Cats C/D visibility ½ mile. Baro-VNAV and VDP NA when using Fort Wayne Intl altimeter setting. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 2800 direct APPAL and hold.

ATIS 133.25	INDIANAPOLIS CENTER 120.65 317.8	MUNCIE TOWER ★ 120.1 (CTAF) 0	GND CON 121.9	UNICOM 122.95
-----------------------	--	---	-------------------------	-------------------------

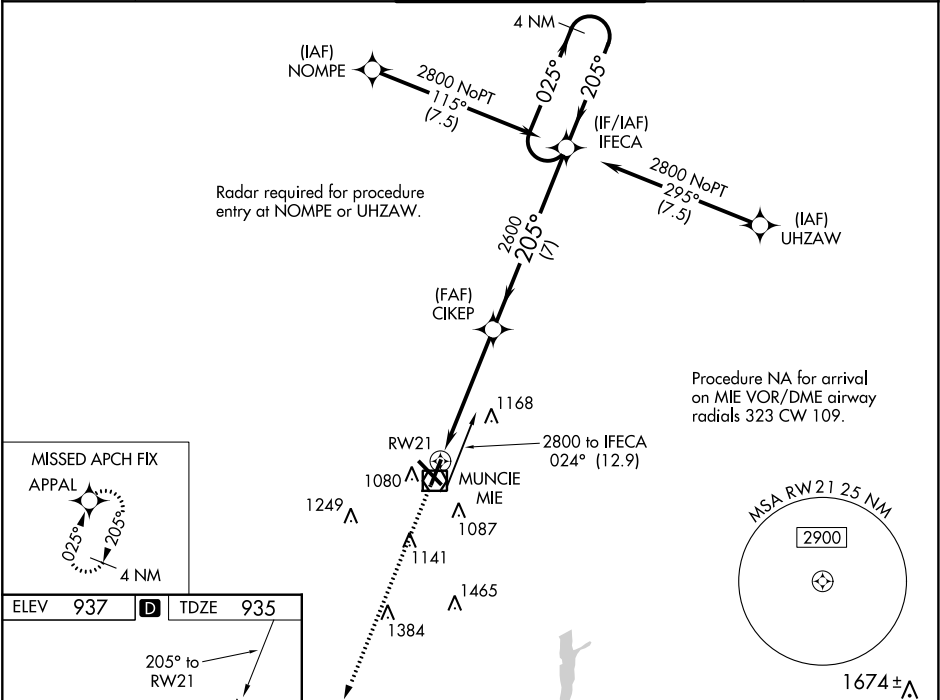

ELEV 937	TDZE 935
205° to RWY 21 1200 x 100 6500 x 130 TWR 1018 AS	
2800 APPAL *LNAV only CIKEP IFECA 4 NM Holding Pattern 025° 205° 2800 GP 3.00° TCH 45 1.3 3.8 NM 7 NM	
CATEGORY	A B C D
LPV DA	1195-7/8 260 (300-%)
LNAV/VNAV DA	1351-13/8 416 (500-1%)
LNAV MDA	1400-1 465 (500-1) 1400-13/8 465 (500-1%)
CIRCLING	1460-1 523 (600-1) 1500-11/2 563 (600-11/2) 1600-2 663 (700-2)