





LOC I-CWF	APP CRS	Rwy ldg	10702
110.7	150°	TDZE	16
		Apt Elev	17

ILS or LOC RWY 15

CHENNAULT INTL (CWF)

From CEVKU: RNAV 1-GPS required.		MALSR	MISSED APPROACH: Climb to 2000 direct LCH VORTAC and hold.
<p>▼ When local altimeter setting not received, use Lake Charles Rgnl altimeter setting and increase all DA 37 feet and all MDA 40 feet. For inop ALS, increase S-ILS 15 Cat E visibility to ¾ SM, and S-LOC 15 Cats C/D/E to 1 ¼ SM. For inop ALS when using Lake Charles altimeter settings, increase S-ILS 15 Cat E visibility to ¾ SM, and S-LOC 15 Cat E to 1 ¼ SM.</p>		ASR	

ATIS	LAKE CHARLES APP CON*	CHENNAULT TOWER*	GND CON	UNICOM
120.0	119.8 282.3	124.2 (CTAF) 290.4	121.65 275.8	122.95

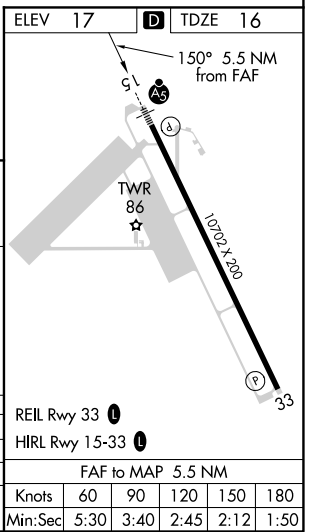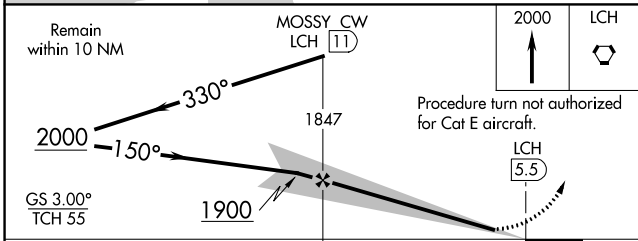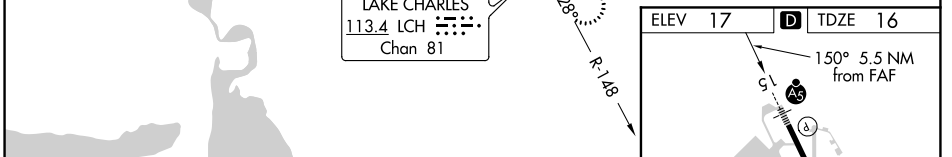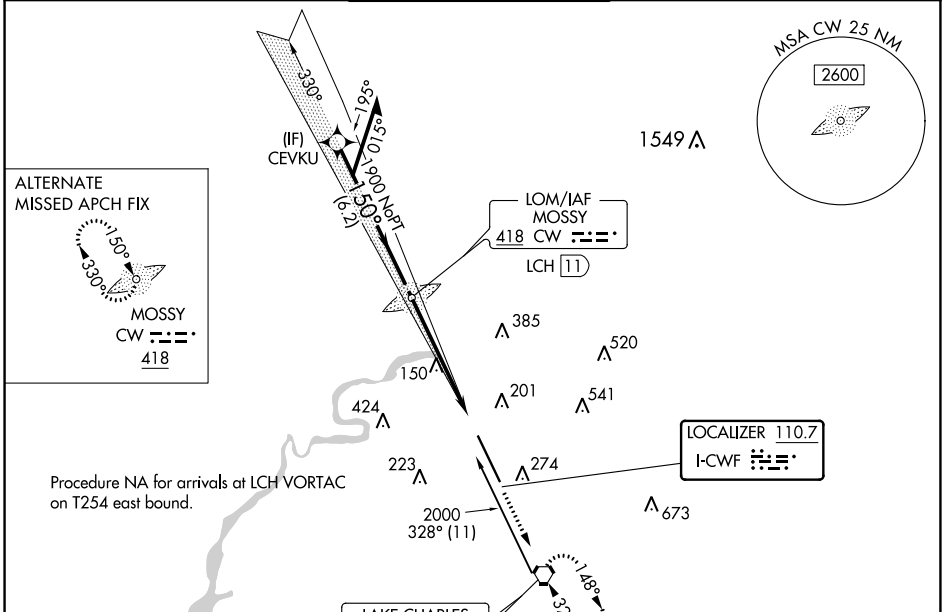

CATEGORY	A	B	C	D	E
S-ILS 15	216-1/2 200 (200-1/2)				
S-LOC 15	400-1/2	384 (400-1/2)	400-3/4	384 (400-3/4)	
CIRCLING	640-1	623 (700-1)	640-1 3/4	740-2 1/4	900-3
			623 (700-1 3/4)	723 (800-2 1/4)	883 (900-3)

SC-4, 16 JUN 2022 to 14 JUL 2022

SC-4, 16 JUN 2022 to 14 JUL 2022