

WAAS CH 41063 W17A	APP CRS 168°	Rwy Idg 6002 TDZE 152 Apt Elev 152
--	------------------------	---


RNAV (GPS) RWY 17R
DAVID WAYNE HOOKS MEML (DWH)

RNP APCH-GPS.

Baro-VNAV NA when using George Bush Intcntl/Houston altimeter setting. For uncompensated Baro-VNAV systems, procedure NA below -2°C or above 54°C. Rwy 17R helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use George Bush Intcntl/Houston altimeter setting: Increase all DAs 36 feet and visibilities ½ SM; increase all MDAs 40 feet. When control tower closed, LPV visibility 1 SM.

MISSED APPROACH:
Climb to 2000 direct
KOHRY and hold.

ATIS 128.375	HOUSTON APP CON 119.7 281.4	HOOKS TOWER★ 127.4 354.1 EAST 118.4 (CTAF) 0 354.1 WEST	GND CON 121.8 239.0	CLNC DEL 119.45	UNICOM 122.95
------------------------	---------------------------------------	---	-------------------------------	---------------------------	-------------------------

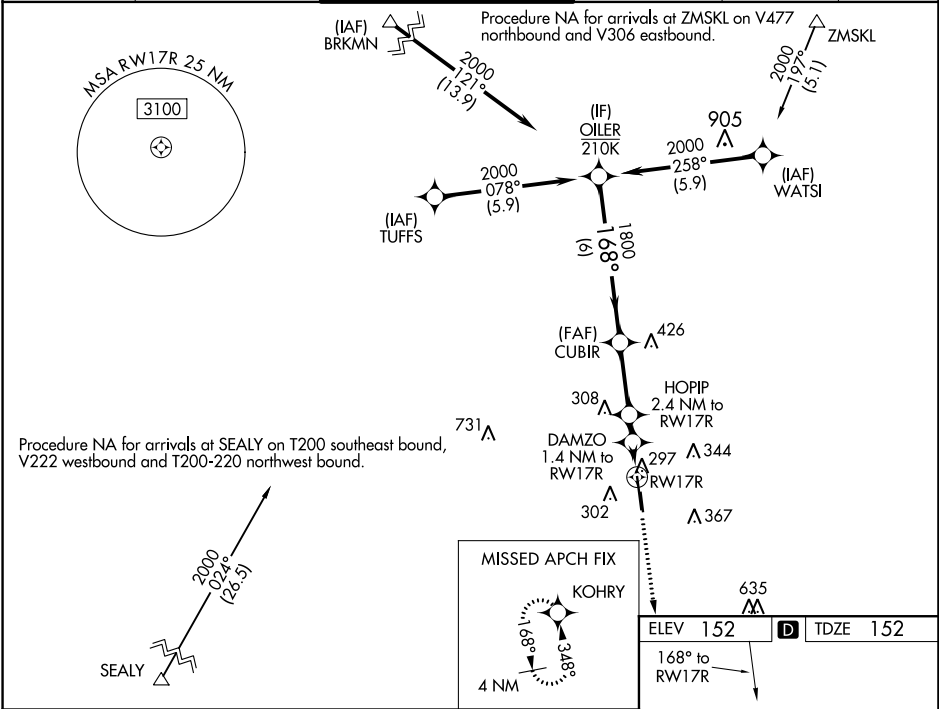

OILER		CUBIR		HOPIP		DAMZO		RW17R					
2000		1800		1800		1680		1520					
GP 3.00°		TCH 52		*960		*640		*640					
6 NM		2.6 NM		1 NM		1.4 NM		1.4 NM					
CATEGORY	A	B	C	D									
LPV DA	402-¾		250 (300-¾)										
LNAV/VNAV DA	508-1½		356 (400-1½)										
LNAV MDA	600-1		448 (500-1)		600-1½		448 (500-1½)						
CIRCLING	640-1		660-1		680-1½		780-2						
	488 (500-1)		508 (600-1)		528 (600-1½)		628 (700-2)						

