

ATIS 134.55

CLINC DEL 121.6

GND CON 121.6

ANN ARBOR TOWER ★

120.3 (CTAF)

119 05 2840

TAKEOFF MINIMUMS

Rwys 12, 30: NA - Environmental.

Rwys 6, 24: Standard.

NOTE: RADAR required.

NOTE: DMF required.

NOTE: For use by non-RNAV equipped aircraft only

SPECIAL INSTRUCTIONS:

When using this departure file the appropriate departure fix and route:

Aircraft over HARWI must file EL220 and below. PROOP AIRCRAFT departing KDTW

[illegible]

runway ZIL/R and ZZL/R westbound, cross DXO 3.5 DME at or above 2500 MSL.

Aircraft landing Cleveland (CLE) must file MAARS transition. Turbojet departures


at/above 10000, maintain 280K until advised by ATC. If unable, advise ATC

prior to denaturation

NARRATIVE ON FOLLOWING PAGE)

IN ARKANSAS ONLY
NOTE CLASSIFICATION

TOP ALTITUDE:
3000

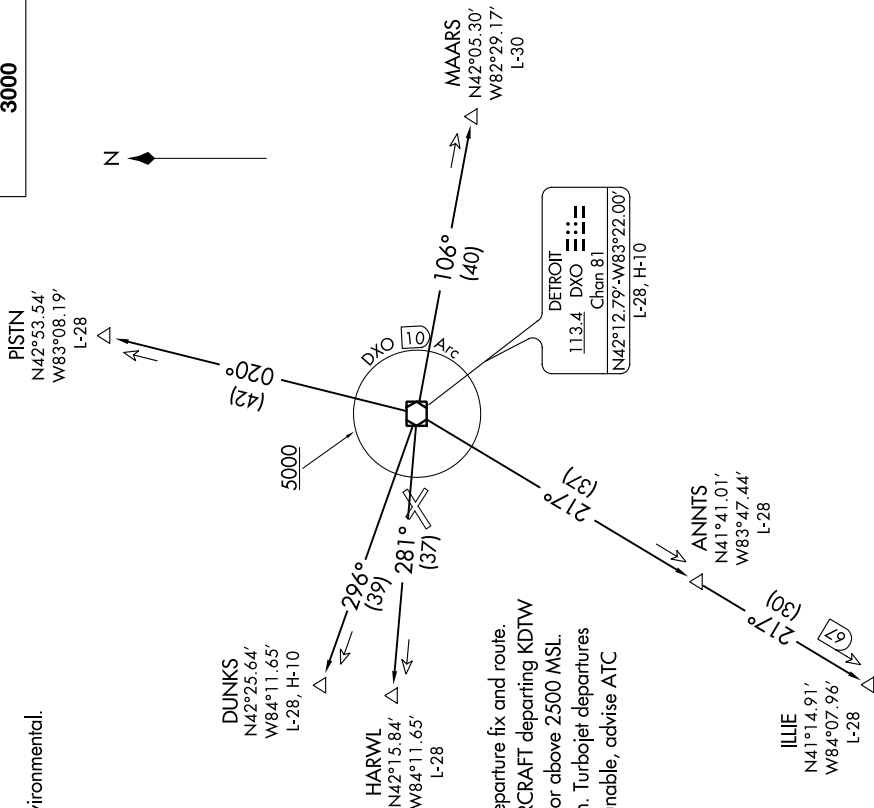

METRO THREE DEPARTURE

(METRO3.DXO) 05NOV20

ANN ARBOR, MICHIGAN

ANN ARBOR MUNI (ARB)