

LOC/DME I-FQD	APP CRS	Rwy Idg	5000
109.55	009°	TDZE	1059
Chan 32(Y)		Apt Elev	1077

LOC RWY 1


RUTHERFORD COUNTY-MARCHMAN FIELD (FQD)

▼ VDP NA with Shelby-Cleveland County Rgnl altimeter setting. When local altimeter setting not received, use Shelby-Cleveland County Rgnl altimeter setting and increase all MDA 80 feet and S-1 Cat C and D and Circling Cat C visibilities 1/8 mile; increase Circling Cat D visibility 1/4 mile. DASCAs fix minimums: Increase S-1 Cat C and D and Circling Cat C and D visibilities 1/4 mile.

▲ NA

MISSED APPROACH: Climb to 1800 then climbing left turn to 3000 on heading 165° and on I-FQD localizer south course to EPOZI INT/I-FQD 12.8 DME and hold.

AWOS-3	GREER APP CON ★	UNICOM
118.275	119.4 350.2	122.8 (CTAF) 0

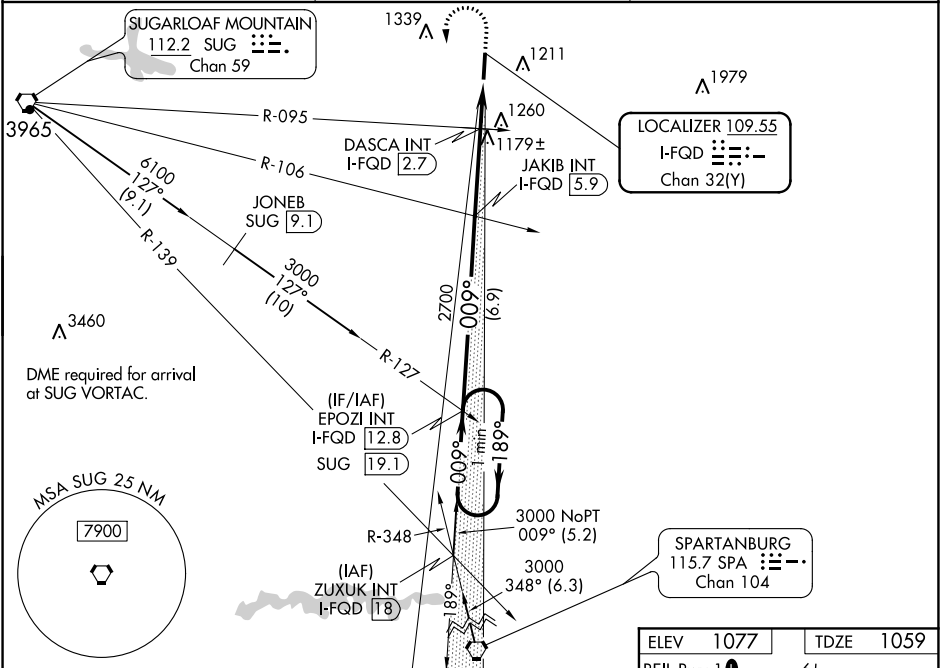

One Minute Holding Pattern		EPOZI INT I-FQD 12.8		1800		3000		hdg 165° I-FQD		EPOZI INT					
3000		← 189°		009° →		009°		3.00° TCH 40		JAKIB INT I-FQD 5.9		DASCA INT I-FQD 2.7		I-FQD 0.9	
*1680 when using Shelby-Cleveland County Rgnl altimeter setting.															
		6.9 NM		3.2 NM		0.7 NM		1.1							
CATEGORY		A		B		C		D							
S-1		1600-1		541 (600-1)		1600-1½		541 (600-1½)							
CIRCLING		1600-1 523 (600-1)		1620-1 543 (600-1)		1640-1½ 563 (600-1½)		1820-2½ 743 (800-2½)							
DASCA FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)															
S-1		1440-1		381 (400-1)		1440-1½		381 (400-1½)							
CIRCLING		1560-1 483 (500-1)		1620-1 543 (600-1)		1640-1½ 563 (600-1½)		1820-1½ 743 (800-1½)							

ELEV	1077	TDZE	1059		
REIL Rwy 1	0	MIRL Rwy 1-19	0		
61					
5000 X 100					
0.4% UP					
009° 5 NM from FAF					
FAF to MAP 5 NM					
Knots	60	90	120	150	180
Min:Sec	5:00	3:20	2:30	2:00	1:40