

WAAS CH 53316 W35A	APP CRS 351°	Rwy Idg TDZE Apt Elev	5000 5 5
--	------------------------	-----------------------------	-------------------------------------


RNAV (GPS) RWY 35
MARCO ISLAND EXEC (MKY)

PBN APCH.


Baro-VNAV and VDP NA when using Naples altimeter setting. Rwy 35 helicopter visibility reduction below 3/4 SM NA. When local altimeter setting not received, use Naples altimeter setting and increase LPV DA to 312 feet; increase LNAV/VNAV DA to 420 feet; increase all MDAs 40 feet and visibility Cat C 1/4 SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 2°C or above 54°C.

MISSED APPROACH: Climb to 3000 direct AVCOF and hold, continue climb-in-hold to 3000.

AWOS-3PT 120.075	FORT MYERS APP CON ★ 124.125 371.85	CLNC DEL 120.8	UNICOM 122.7 (CTAF)
----------------------------	---	--------------------------	-------------------------------

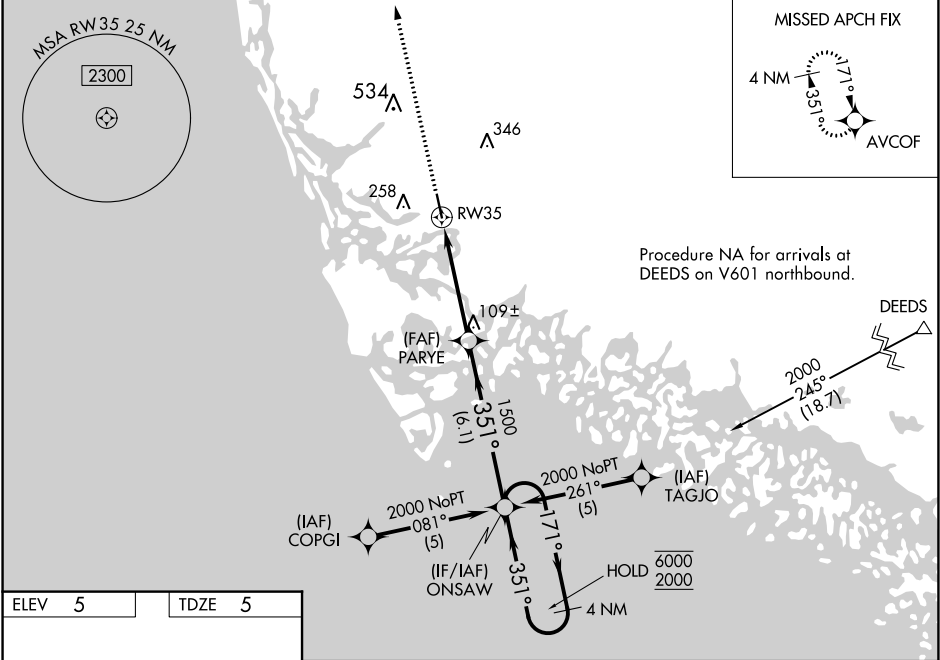

ELEV 5	TDZE 5
--------	--------

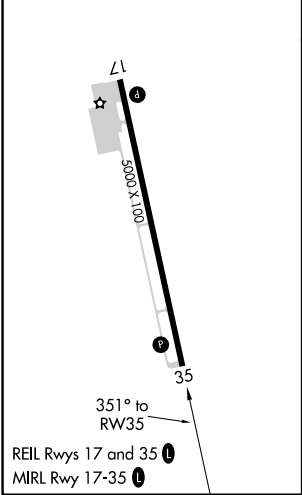

3000	AVCOF	VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 32).			
*LNAV only.		4 NM Holding Pattern			
RW35		ONS AW			
*1.5 NM to RW35		171° → 6000			
PARYE		← 351° 2000			
1500		GP 3.00°			
1500		TCH 40			
1.5 NM		6.1 NM			
3 NM					
CATEGORY	A	B	C	D	
LPV DA	286-1	281 (300-1)			
LNAV/VNAV DA	394-1½	389 (400-1½)			
LNAV MDA	520-1	515 (600-1)	520-1½ 515 (600-1½)	520-1¾ 515 (600-1¾)	
CIRCLING	620-1	615 (700-1)	660-1¾ 655 (700-1¾)	840-2¾ 835 (900-2¾)	

SE-3, 16 JUN 2022 to 14 JUL 2022

SE-3, 16 JUN 2022 to 14 JUL 2022