

WAAS
CH **86333**
W09A

APP CRS
095°

Rwy Idg **5200**
TDZE **4086**
Apt Elev **4094**


RNAV (GPS) RWY 9

NORTH BIG HORN COUNTY (U68)

Baro-VNAV NA when using Greybull altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -23°C (-9°F) or above 49°C (121°F). DME/DME RNP-0.3 NA. When Rwy 9 VGSI inop, Straight-in and Circling minimums NA at night. Helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Greybull altimeter setting and increase all DA 87 feet and all LPV and LNAV/VNAV visibility 1/8 mile, increase all MDA 100 feet and LNAV Cats C/D visibility 3/8 mile and increase Circling Cat C visibility 1/4 mile.

MISSED APPROACH: Climb to 4600 then climbing right turn to 8500 direct SEZJI and hold.

AWOS-3 119.925	SALT LAKE CENTER 133.25 285.6	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

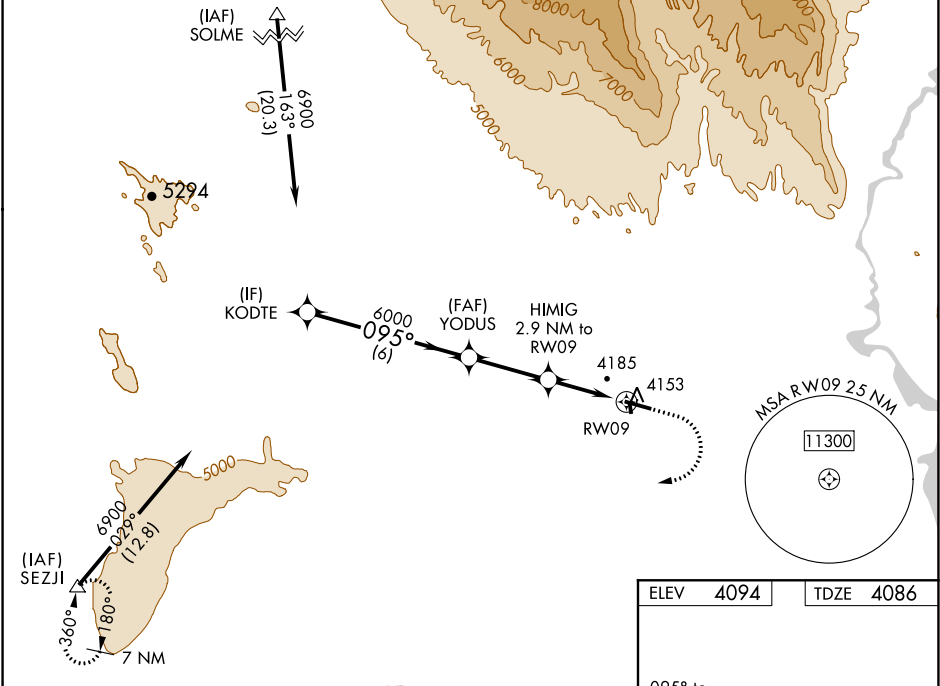

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 40).

4600 8500 SEZJI

KODTE 6900 095° YODUS 6000 HIMIG 2.9 NM to RW09 RW09

GP 3.00° TCH 55

* 5060

* LNAV only.

6 NM 2.9 NM 2.9 NM

CATEGORY	A	B	C	D
LPV DA		4336-1	250 (300-1)	
LNAV/VNAV DA		4344-1	258 (300-1)	
LNAV MDA		4440-1	354 (400-1)	
CIRCLING	4520-1 426 (500-1)	4680-1 586 (600-1)	4940-2½ 846 (900-2½)	5260-3 1166 (1200-3)

REIL Rwy 9 and 27 0
MRL Rwy 9-27 0

095° to RW09

91 186 X 59 34 5200 X 75 27