

APP CRS
348°

Rwy Idg
TDZE
360
Apt Elev
364

6004

RNAV (GPS) RWY 35

MOUNT PLEASANT RGNL (OSA)


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Paris altimeter setting and increase all DA/MDA 120 feet, increase LNAV/VNAV visibilities ½ mile all Cats, LNAV visibilities ¼ mile all Cats and circling visibilities ¼ mile all Cats. VDP and Baro-VNAV NA when using Paris altimeter setting.

MISSED APPROACH: Climb to 2000 direct AVORE and hold.

AWOS-3 119.775	FORT WORTH CENTER 132.025 360.75	UNICOM 122.7 (CTAF) 0
-------------------	-------------------------------------	--------------------------

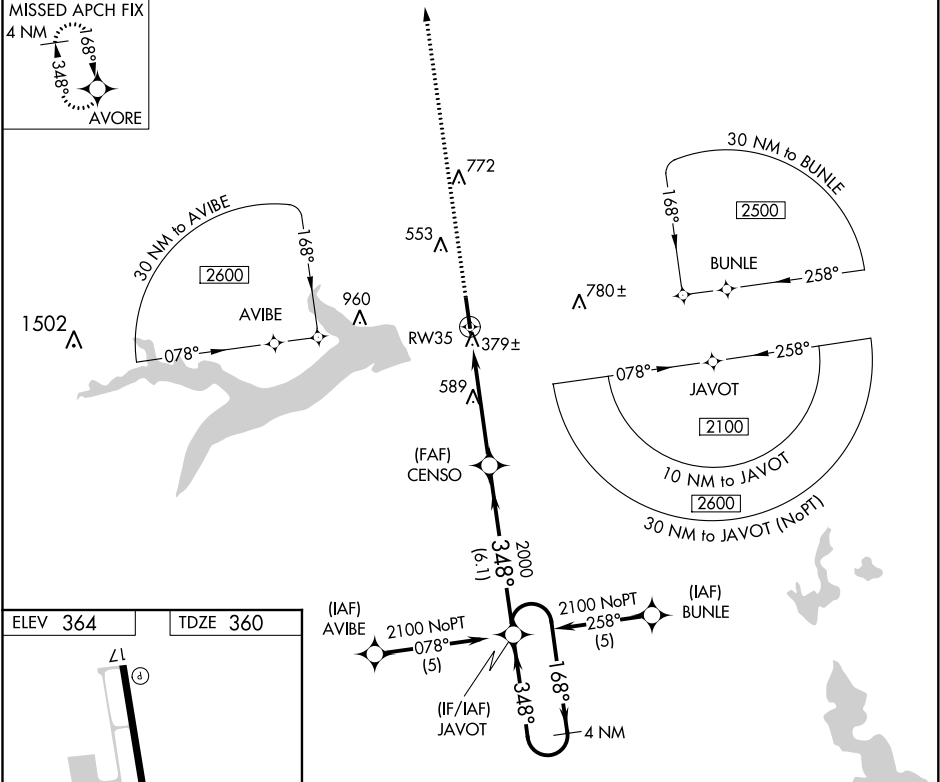

ELEV 364

TDZE 360

2000 AVORE

4 NM Holding Pattern

GP 3.00° TCH 44

*LNAV only.

*1.6 NM to RW35

CENSO

JAVOT

168°

348°

2100

2000

1.6

3.4 NM

6.1 NM

CATEGORY	A	B	C	D
LNAV/VNAV DA	700-1¼		340 (400-1¼)	
LNAV MDA	900-1	540 (600-1)	900-1½ 540 (600-1½)	900-1¾ 540 (600-1¾)
CIRCLING	900-1	536 (600-1)	1040-2 676 (700-2)	1040-2¼ 676 (700-2¼)