

WAAS
CH **49111**
W14A

APP CRS
143°

Rwy Idg
TDZE **1275**
Apt Elev **1303**

RNAV (GPS) RWY 14

BRANSON (BBG)

RNP APCH.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 46°C. When local altimeter setting not received, use Harrison altimeter setting and increase all DA 47 feet and all MDA 60 feet. VDP and Baro-VNAV NA when using Harrison altimeter setting.

MISSED APPROACH: Climb to 4000 direct UYULA and hold.

ATIS 124.625	SPRINGFIELD APP CON 126.35	BRANSON TOWER ★ 128.15 (CTAF) 0	GND CON 118.4	CLNC DEL 118.4	SPRINGFIELD CLNC DEL 126.35 (When tower closed)	UNICOM 122.95
------------------------	--------------------------------------	--	-------------------------	--------------------------	--	-------------------------

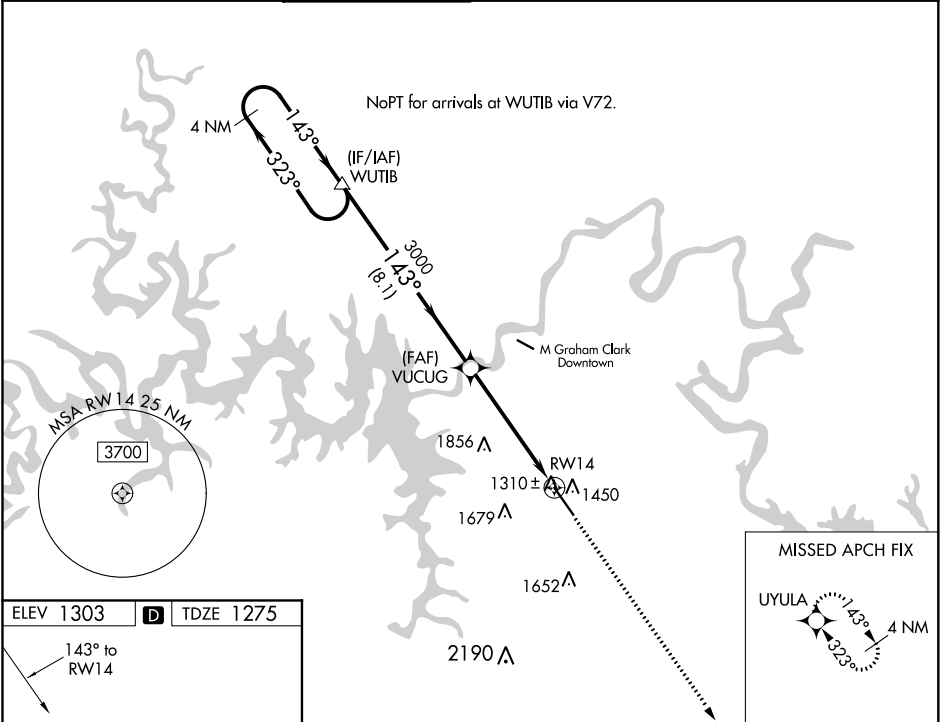

ELEV 1303

D

TDZE 1275

REIL Rwy 14 **0**
HIRL Rwy 14-32 **0**

4 NM Holding Pattern

WUTIB

4000

323°

143°

GP 3.00°
TCH 51

8.1 NM

3 NM

2.2

VUCUG

3000

*2.2 NM to RWY14

*LNAV only

RWY14

4000

UYULA

CATEGORY	A	B	C	D
LPV DA	1525-1 250 (300-1)			
LNAV/VNAV DA	1798-2 523 (500-2)			
LNAV MDA	2020-1 745 (800-1)	2020-1¼ 745 (800-1¼)	2020-2¼ 745 (800-2¼)	2020-2½ 745 (800-2½)