

WAAS
CH **56410**
W04A

APP CRS
042°

Rwy Idg **7504**
TDZE **78**
Apt Elev **79**

RNAV (GPS) RWY 4

MONROE RGNL (MLU)

RNP APCH.

▼

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500. Circling Rwy 14 NA at night.
** RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 3000 direct LURBY and hold.

ATIS
125.05


MONROE APP CON ★
118.15 290.475

MONROE TOWER ★
118.9 (CTAF) 0 257.8

GND CON
121.9

CLNC DEL
121.65

UNICOM
122.95

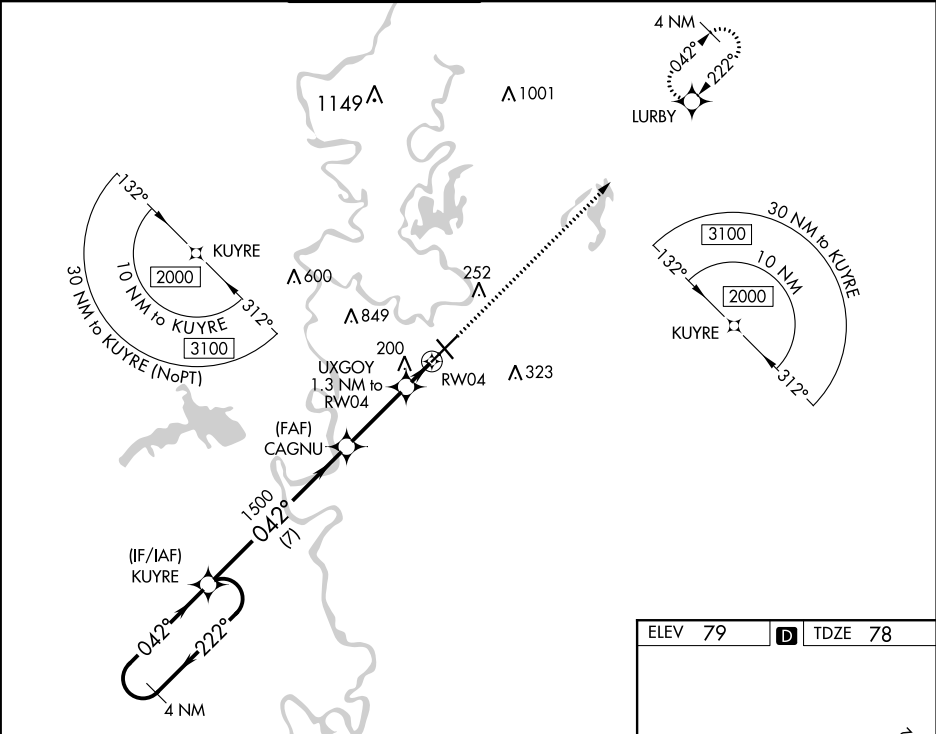

4 NM Holding Pattern

KUYRE

2000

←222°

042°→

GP 3.00°

TCH 50

CAGNU

1500

042°

UXGOY 1.3 NM to RW04

3000

LURBY

*LNAV only.

7 NM

3 NM

1.3 NM

CATEGORY	A	B	C	D
LPV DA **		278/24	200 (200-½)	
LNAV/VNAV DA		383/24	305 (400-½)	
LNAV MDA	460/24	382 (400-½)	460/35	382 (400-¾)
CIRCLING	580-1	501 (600-1)	740-1¾ 661 (700-1¾)	1160-3 1081 (1100-3)

TWR 209

REIL Rwy 14 and 32

MIRL Rwy 14-32 0

HIRL Rwy 4-22 0