

LOM TU 420	APP CRS 001°	Rwy Idg 7150 TDZE 347 Apt Elev 347	NDB RWY 36 TUPELO RGNL (TUP)
---------------	-----------------	--	---------------------------------

▼

▲ NA


When local altimeter setting not received, use Columbus AFB altimeter setting and increase all MDA 120 feet, increase S-36 Cats C and D visibility ¾ SM and Circling Cats C and D ½ SM. For inop ALS, increase S-36 Cat A and B visibility to 1 SM and Cat C and D to 1 ¾ SM. For inop ALS when using Columbus AFB altimeter setting, increase S-36 Cat A and B visibility to 1 SM and Cat C and D to 1 ¾ SM.

MALSR

AS

MISSED APPROACH:
Climb to 1500 then
climbing left turn to 3000
direct TU LOM and hold.

ASOS 133.525	MEMPHIS CENTER 128.5 279.55	TUPELO TOWER ★ 118.775 (CTAF) 254.275	GND CON 121.825 254.275
-----------------	--------------------------------	--	----------------------------

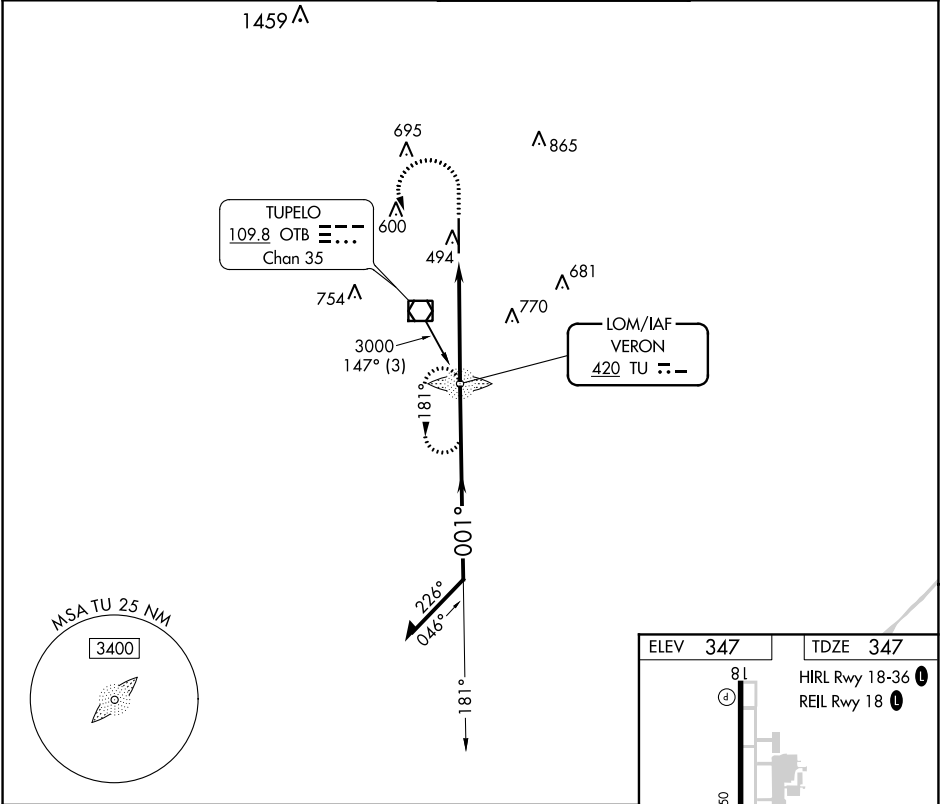

1500	3000	TU													
CATEGORY		A	B	C		D	FAF to MAP 4.7 NM								
S- 36		840-3/4 493 (500-3/4)		840-1 493 (500-1)		Knots 60 90 120 150 180									
CIRCLING		840-1 493 (500-1)		900-1 1/2 553 (600-1 1/2)		1140-2 1/2 793 (800-2 1/2)		Min:Sec 4:42 3:08 2:21 1:53 1:34							