

LOC/DME I-ETI 110.7 Chan 44	APP CRS 091°	Rwy ldg 5350 TDZE 19 Apt Elev 19
---	------------------------	---


ILS or LOC RWY 9

CHARLESTON EXEC (JZI)

▼ DME required. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Charleston AFB/Intl altimeter setting and increase DA to 307 feet and all MDAs 40 feet, increase S-ILS 9 visibility all Cats ½ SM; increase S-LOC 9 and Circling Cats C/D visibility ¼ SM; increase S-LOC YOCUB fix minimums Cats C/D visibility ¼ SM and Circling YOCUB fix minimums Cats C/D visibility ¼ SM. VDP NA when using Charleston AFB/Intl altimeter setting.

MISSED APPROACH: Climb to 1000 then climbing right turn to 3000 on heading 272° and on CHS VORTAC R-219 to BASSO/CHS 24.9 DME and hold.

AWOS-3 123.775	CHARLESTON APP CON 120.7 306.925	CLNC DEL 119.85	UNICOM 122.8 (CTAF)
--------------------------	--	---------------------------	-------------------------------

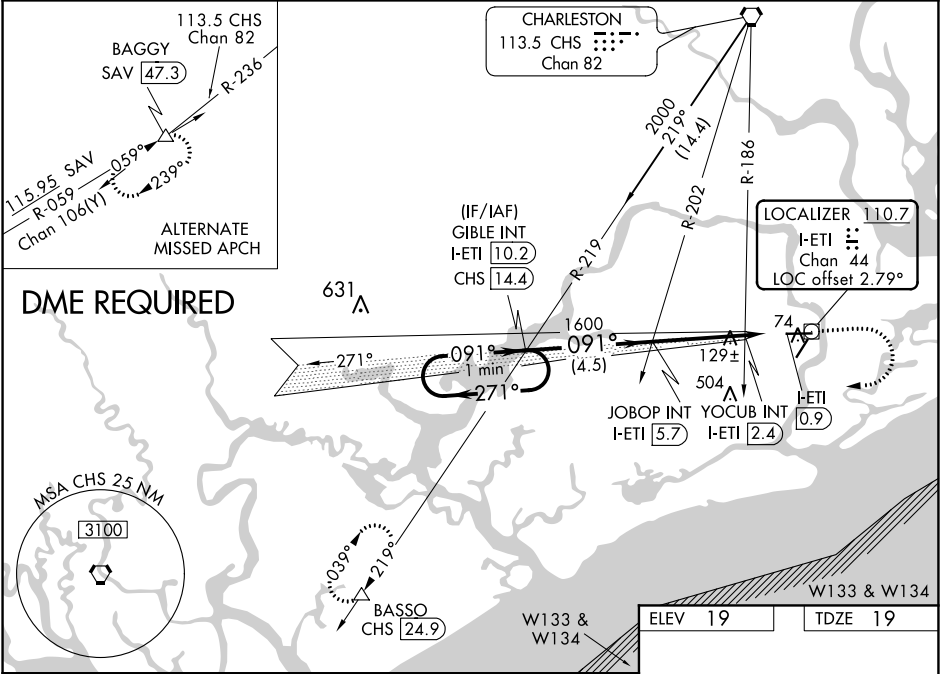

One Minute Holding Pattern	GIBLE INT I-ETI 10.2		JOBOP INT I-ETI 5.7		YOCUB INT I-ETI 2.4		BASSO CHS R-219		
	1700		1600		1600		1600		
GS 3.00° TCH 51		271°		091°		091°		091°	
4.5 NM		3.3 NM		0.5 NM		1 NM		*LOC only.	
CATEGORY	A	B	C	D					
S-ILS 9	275-¾		256 (300-¾)						
S-LOC 9	520-1	501 (600-1)	520-1⅜		501 (600-1⅜)				
CIRCLING	520-1	501 (600-1)	860-2½		841 (900-2½)		860-2¾		841 (900-2¾)
YOCUB FIX MINIMUMS (DUAL VOR RECEIVERS or DME REQUIRED)									
S-LOC 9	380-1	361 (400-1)	380-1⅛		361 (400-1⅛)				
CIRCLING	460-1	480-1	860-2½		860-2¾				
	441 (500-1)	461 (500-1)	841 (900-2½)		841 (900-2¾)				

