

WAAS CH 99436 W35A	APP CRS 354°	Rwy Idg TDZE 1155 Apt Elev 1160	5506 1155 1160
--	------------------------	---	---

RNAV (GPS) RWY 35


STROTHER FLD (WLD)

RNP APCH.

Baro-VNAV and VDP NA when using Wichita Dwight D Eisenhower NH altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Wichita Dwight D Eisenhower NH altimeter setting: increase LPV DA to 1509 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 1557 feet and all visibilities ¼ SM; increase all MDA 120 feet, LNAV Cat C visibility ⅓ SM and Circling Cat C visibility ¼ SM.

MISSED APPROACH:
Climb to 3600 direct ECUWO and hold.

ASOS 118.025	KANSAS CITY CENTER 127.8 319.1	UNICOM 122.8 (CTAF)
------------------------	--	-------------------------------

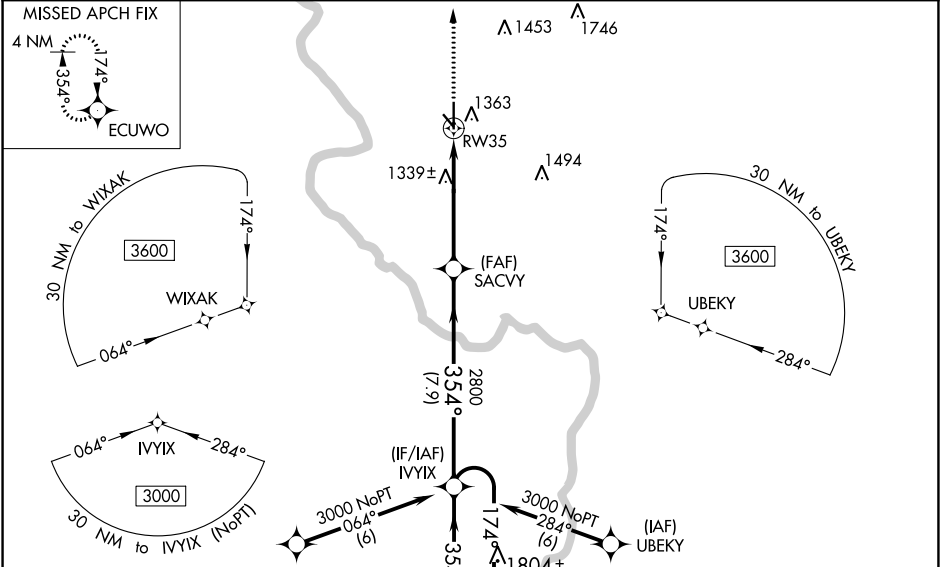

3600

ECUWO

↑

✦

*LNAV only.

RW35

1.4 NM

3.6 NM

7.9 NM

SACVY

2800

354°

174°

354°

6000

3000

GP 3.00°

TCH 54

CATEGORY	A	B	C	D
LPV DA	1405-¾	250 (300-¾)		NA
LNAV/VNAV DA	1453-1	298 (300-1)		NA
LNAV MDA	1640-1	485 (500-1)	1640-1⅜ 485 (500-1⅜)	NA
C CIRCLING	1680-1	520 (600-1)	1680-1½ 520 (600-1½)	NA

354° to RW35

354° to RW35

354° to RW35

MIRL Rwy 13-31

HIRL Rwy 17-35

REIL Rwy 17 and 35

ELEV 1160

TDZE 1155

354° to RW35

354° to RW35

354° to RW35

MIRL Rwy 13-31

HIRL Rwy 17-35

REIL Rwy 17 and 35