




LOC/DME I-APA 111.3 Chan 50	APP CRS 350°	Rwy Idg TDZE Apt Elev	35R 10001 5885 5885	35L 7001 5869 5885
--	------------------------	-----------------------------	---	--

ILS or LOC RWY 35R

CENTENNIAL (APA)

DME required for LOC only. RADAR required for procedure entry.		MALSR	MISSED APPROACH: Climb to 7400 then climbing right turn to 9200 on heading 160° and FQF VORTAC R-197 to HOHUM INT/FQF 22.5 DME and hold.
Rwy 35L helicopter visibility reduction below 1 SM NA. For inop ALS, increase S-LOC 35R Cat C/D visibility to 1½ SM. Sidestep and Circling Rwy 35L NA at night.			

ATIS 120.3	DENVER APP CON 132.75 269.3	CENTENNIAL TOWER 118.9	GND CON 121.8	CLNC DEL 128.6
----------------------	---------------------------------------	---	-------------------------	--------------------------

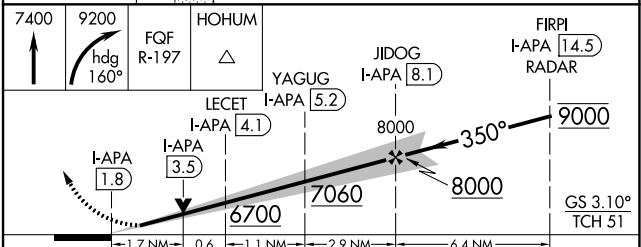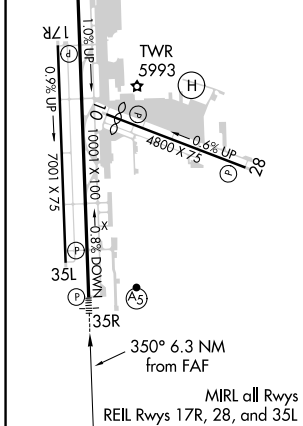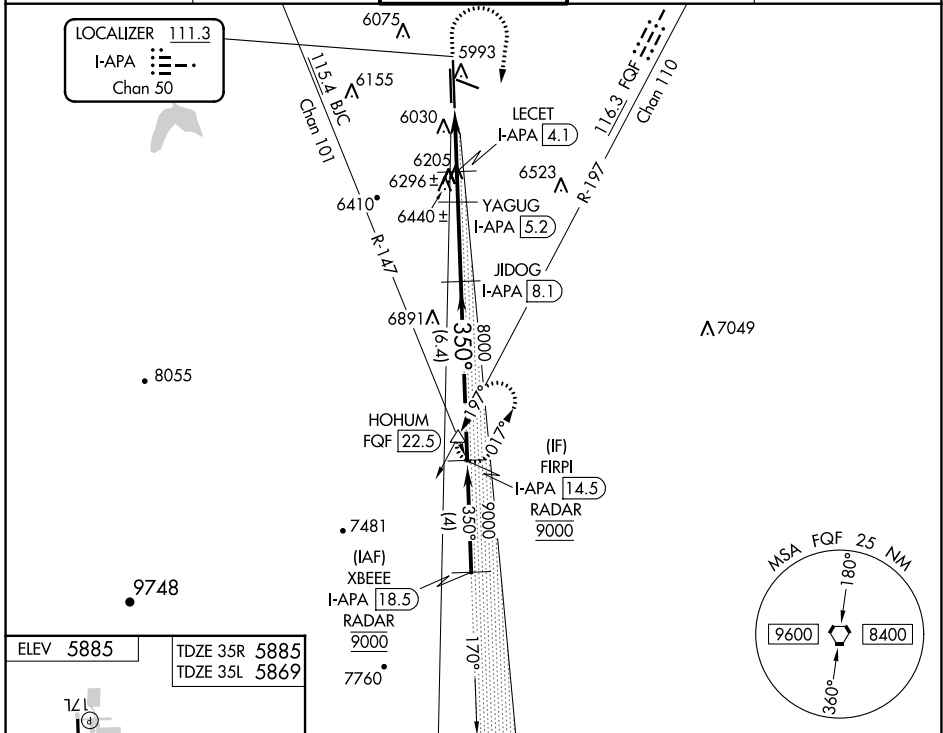

CATEGORY	A	B	C	D
S-ILS 35R	6085-½ 200 (200-½)			
S-LOC 35R	6460-½	575 (600-½)	6460-1¼	575 (600-1¼)
SIDESTEP 35L	6460-1	591 (600-1)	6460-1½ 591 (600-1½)	6460-2 591 (600-2)
CIRCLING	6460-1 575 (600-1)	6540-1 655 (700-1)	6740-2½ 855 (900-2½)	6760-2¾ 875 (900-2¾)