

APP CRS	Rwy Idg	5509
096°	TDZE	385
	Apt Elev	385

RNAV (GPS) RWY 10

BALDWIN COUNTY RGNL (MLJ)

RNP APCH.

▼


▲

Rwy 10 helicopter visibility reduction below ¾ SM NA. Inop table does not apply to Cats A/B. When local altimeter setting not received, use Middle Georgia Rgnl altimeter setting and increase all MDA 100 feet and increase LNAV visibility Cat C/D ¼ SM and Circling Cat C ½ SM. VDP NA when using Middle Georgia Rgnl altimeter setting.

MALSF

MISSED APPROACH: Climb to 3000 direct FETOP and hold.

AWOS-3 120.925	ATLANTA APP CON ★ 124.2 279.6	UNICOM 122.975 (CTAF) 0
-------------------	----------------------------------	----------------------------

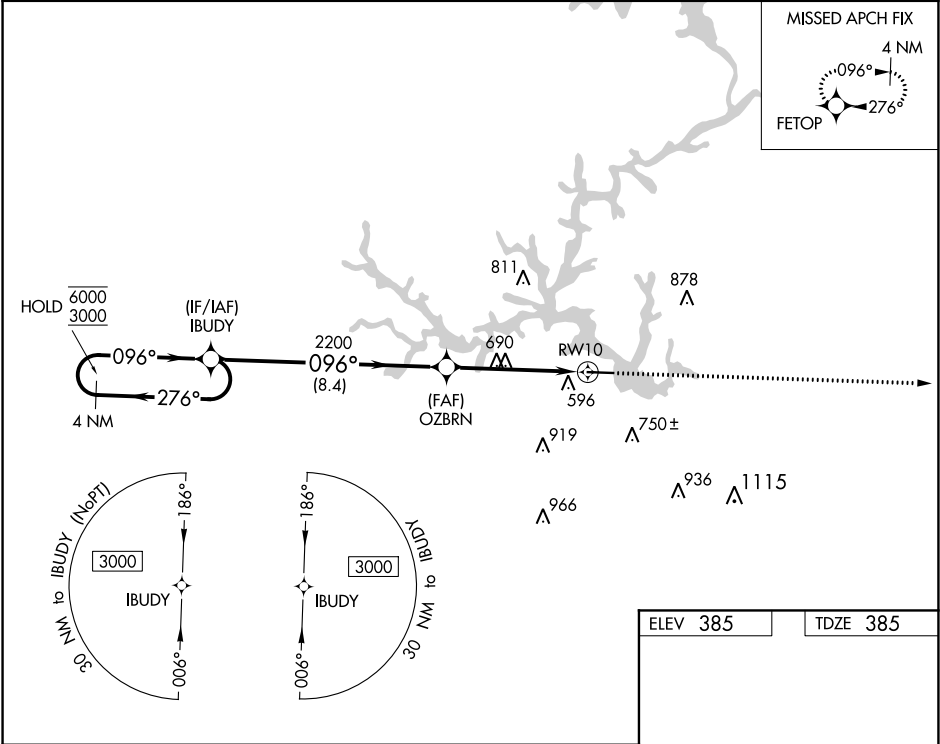

4 NM Holding Pattern		IBUDY		3000 FETOP	
6000 ← 276°		3000 → 096°		OZBRN	
		2200		3.30° TCH 47	
		1.5 NM to RW10		RW10	
		8.4 NM		3.6 NM	
				1.5	
CATEGORY	A	B	C	D	
LNAV MDA	1000-1	615 (700-1)	1000-1½	615 (700-1½)	
CIRCLING	1000-1	615 (700-1)	1100-2 715 (800-2)	1280-3 895 (900-3)	MIRL Rwy 10-28 0 REIL Rws 10 and 28 0