

APP CRS
038°

Rwy Idg
TDZE
3607

13502
3607
3607


RNAV (RNP) Z RWY 4
RICK HUSBAND AMARILLO INTL (AMA)

For uncompensated Baro-VNAV systems, procedure NA below -14°C (7°F) or above 53°C (128°F). RF required. GPS required. For inop ALS, increase RNP 0.30 all Cats visibility to 1½ SM.

MALSR

MISSED APPROACH: (Do not exceed 185K until MAWGO) Climb to 5400 on track 038° to KILTE, right turn to MAWGO, then track 157° to CAUDE and hold.

ATIS 118.85 350.3	AMARILLO APP CON* 119.5 307.0	AMARILLO TOWER* 118.3(CTAF) 257.9	GND CON 121.9 348.6	CLNC DEL 121.65 239.275	UNICOM 122.95
-----------------------------	---	---	-------------------------------	-----------------------------------	-------------------------

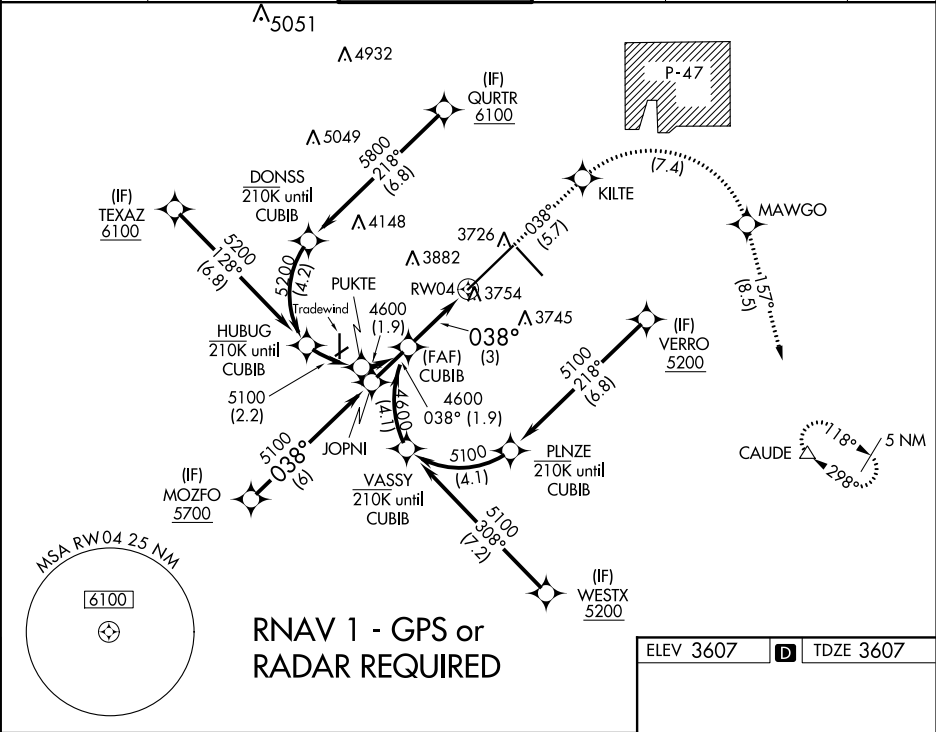

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 61).

5400
↑
tr 038°

KILTE

MAWGO

CAUDE
tr 157°

See planview for multiple IF locations.

GP 3.00°
TCH 44

4600

038°

RW04

3 NM

CATEGORY	A	B	C	D
RNP 0.12 DA		3969/40	362 (400-¾)	
RNP 0.30 DA		4019/50	412 (500-1)	

AUTHORIZATION REQUIRED

ELEV 3607 **D** TDZE 3607

TWR 3724

13502 X 200

700 X 150

038° to RW04

REIL Rwy 13 and 31 **1**
HIRL Rwy 4-22 and 13-31 **1**