

APP CRS
138°

Rwy Idg
TDZE
Apt Elev


6059
611
620

RNAV (RNP) Y RWY 13C
CHICAGO MIDWAY INTL (MDW)

T For uncompensated Baro-VNAV systems, procedure NA below -19°C (-2°F) or above 54°C (130°F). RF required. GPS required. Night landing: Rwy 13C Cat C and D operational VGSIs required, remain on or above VGSIs glidepath until threshold.

MISSED APPROACH: Climb to 1100 then climbing right turn to 2600 direct EON VORTAC and hold.

D-ATIS 132.75	CHICAGO APP CON 128.2 353.875	MIDWAY TOWER 135.2 269.125	GND CON 121.65	CLNC DEL 124.625	CPDLC
-------------------------	---	--------------------------------------	--------------------------	----------------------------	-------

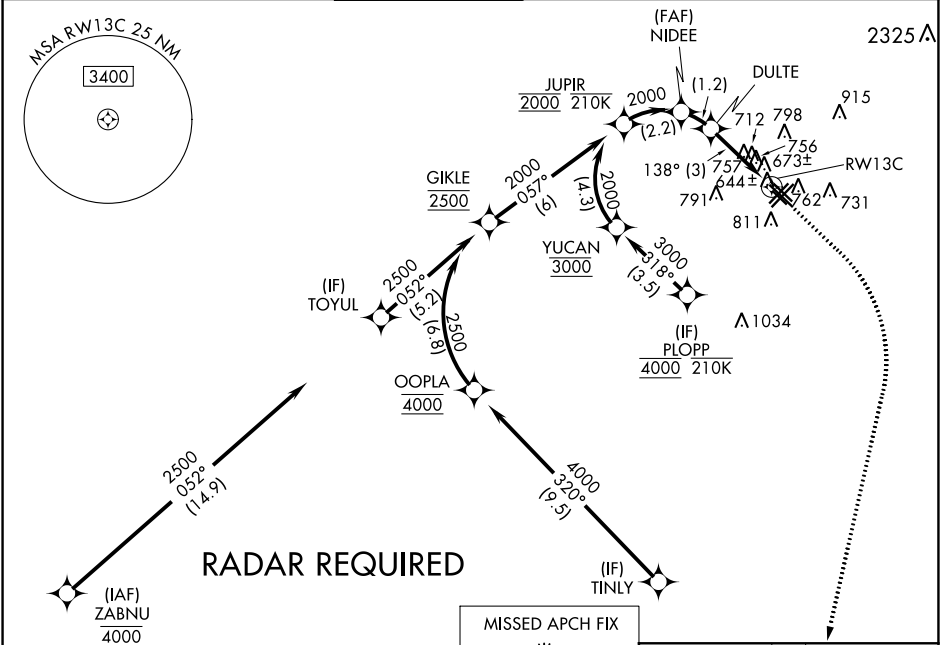

ELEV 620

D

TDZE 611

138° to RWY 13C

See planview for multiple IF locations.

CATEGORY	A	B	C	D
RNP 0.11 DA		891/50	280 (300-1)	
RNP 0.18 DA		997-1¼	386 (400-1¼)	
RNP 0.30 DA		1049-1½	438 (500-1½)	

AUTHORIZATION REQUIRED

HIRL Rwy 13C-31C and 4R-22L

MIRL Rwy 4L-22R, 13L-31R, and 13R-31L

REIL Rwy 4R, 22L, and 31C

RLS Rwy 13C and 31C