

APP CRS
036°

Rwy Idg **10000**
TDZE **645**
Apt Elev **645**

RNAV (RNP) W RWY 4L

DETROIT METRO WAYNE COUNTY (DTW)


RNP AR APCH.

Simultaneous approach authorized. For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 54°C. For inop ALS, increase RNP 0.30 all Cats visibility to RVR 6000.

ALSF-2

MISSED APPROACH: Climb to 1100 then climbing left turn to 4000 direct DOHNT and hold, continue climb-in-hold to 4000.

D-ATIS 133.675	DETROIT APP CON 124.05 284.0	METRO TOWER 135.0 317.725	GND CON 121.8 (NW) 119.45 (NE) 132.725 (SW) 119.25 (SE)	CLNC DEL 120.65	CPDLC
--------------------------	--	-------------------------------------	---	---------------------------	-------

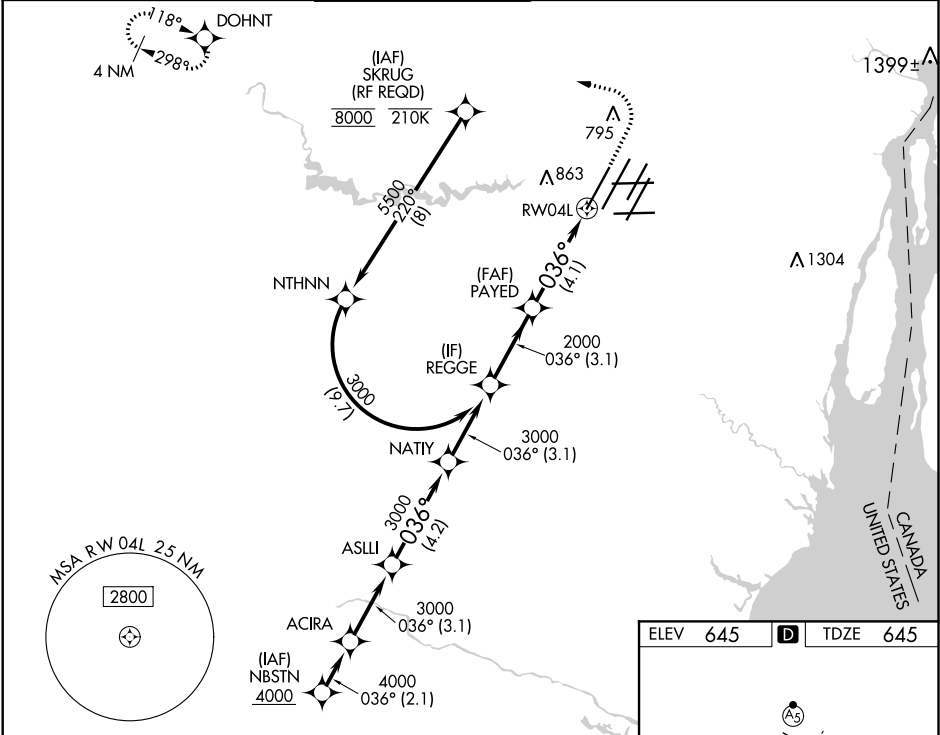

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).

1100

4000

DOHNT

REGGE

PAYED

3000

2000

036°

2000

RW04L

GP 3.00° TCH 55

3.1 NM

4.1 NM

CATEGORY	A	B	C	D
RNP 0.15 DA		970/26	325 (400-½)	
RNP 0.30 DA		1058/40	413 (500-¾)	

AUTHORIZATION REQUIRED

ELEV 645

TDZE 645

TDZ/CL Rwy 3R, 4L, 4R and 22R
REIL Rwy 3L, 9L, 9R and 21R
HIRL all runways